



Scope of Supply/Bill of Material & Mounting Drawings

Part Number: BMW-310GS-02-01-SL / BMW-310GS-02-02





Part Description: Radiator Guard – BMW G 310 GS

Installation / Parts List / Bill of Material for Mounting


NO.	Description	Quantity	Torque * (N-M)	Remarks **
1	Radiator Guard	1		
2	Washer M5	2		
3	Screw M5 X 10	2		
4	Nut M5	2		
SRC Design uses Metric System of Measurement and all dimensions in Millimeters				
* Recommended to use the Torque specified in the table				
** Denotes Usage of Liquid Thread Locker in specified Locations				

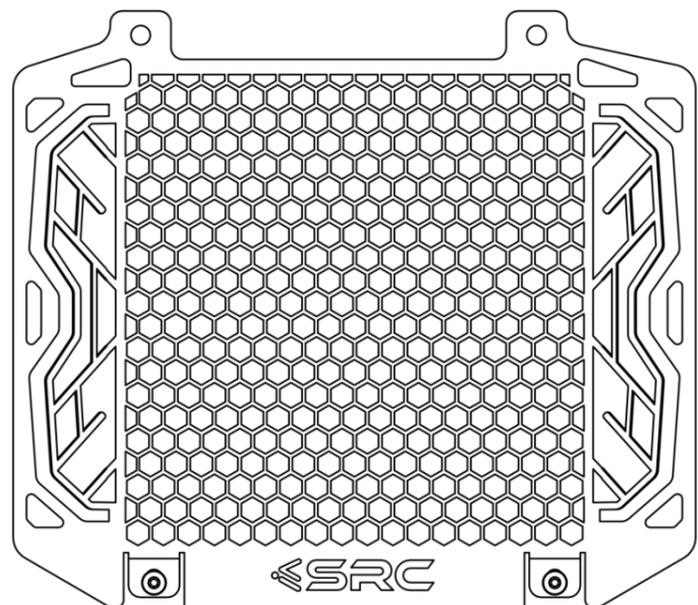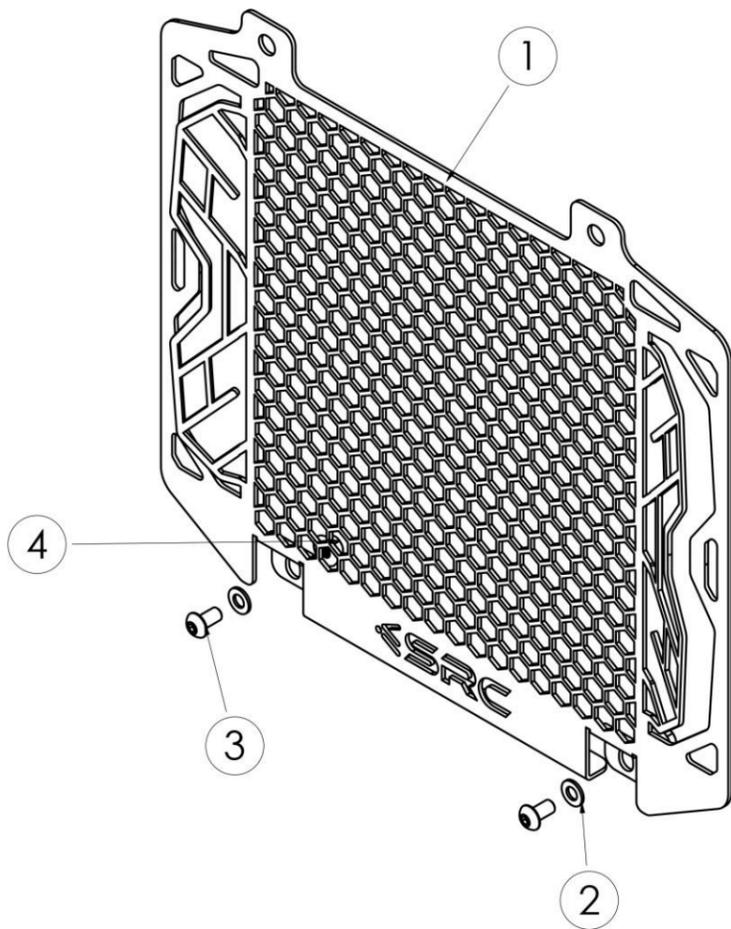

MOUNTING DRAWINGS

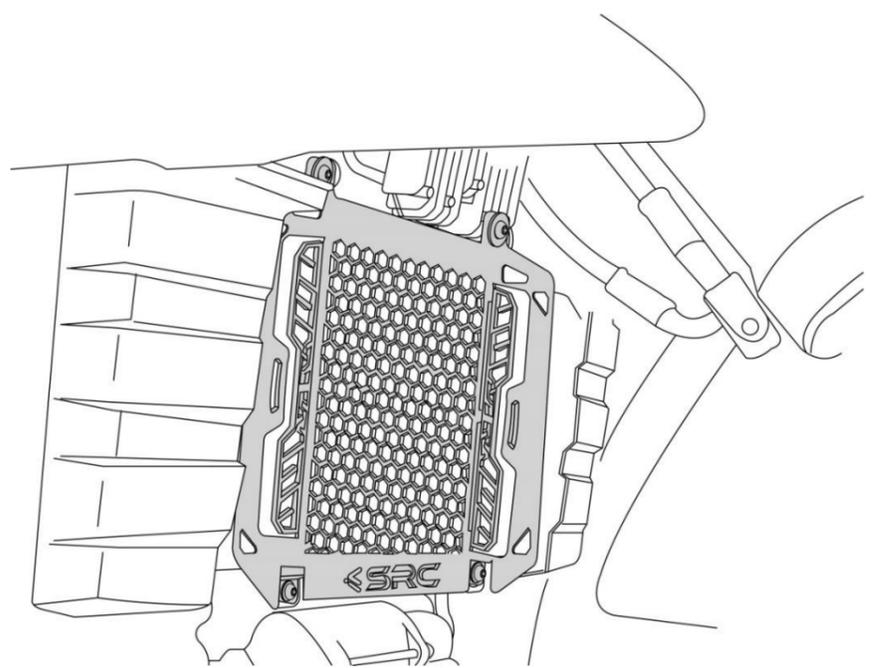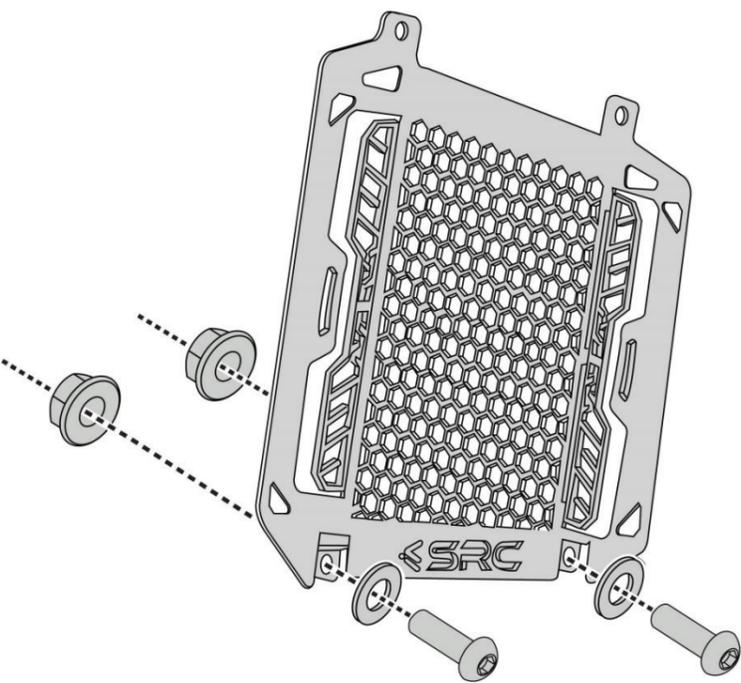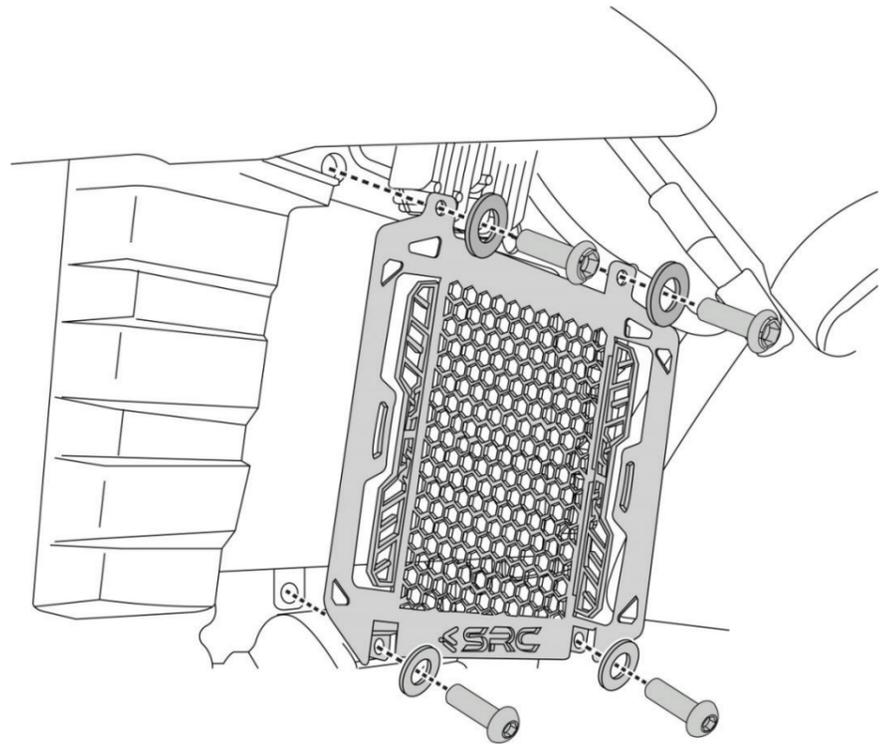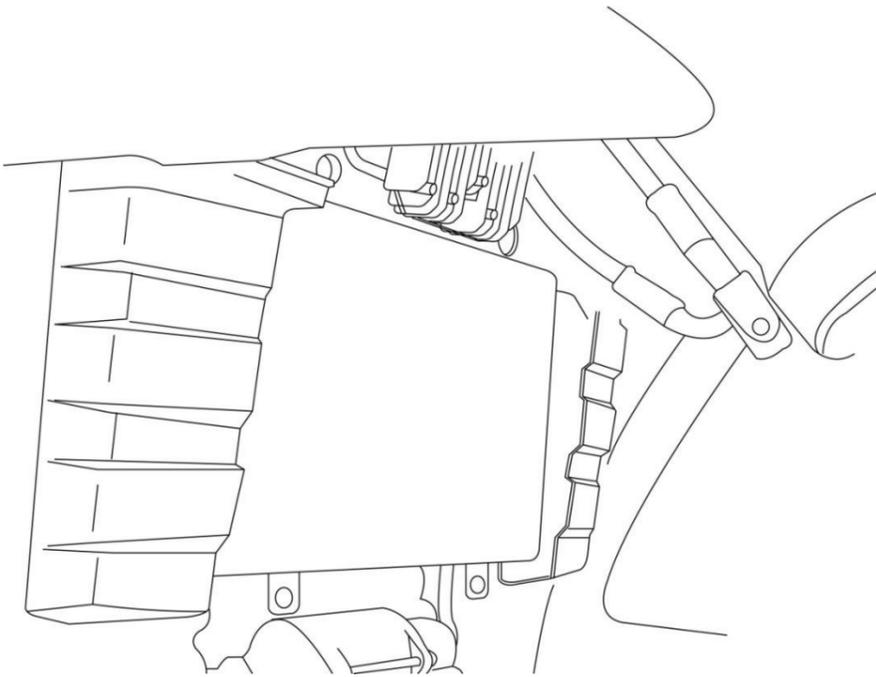

Mounting Instructions

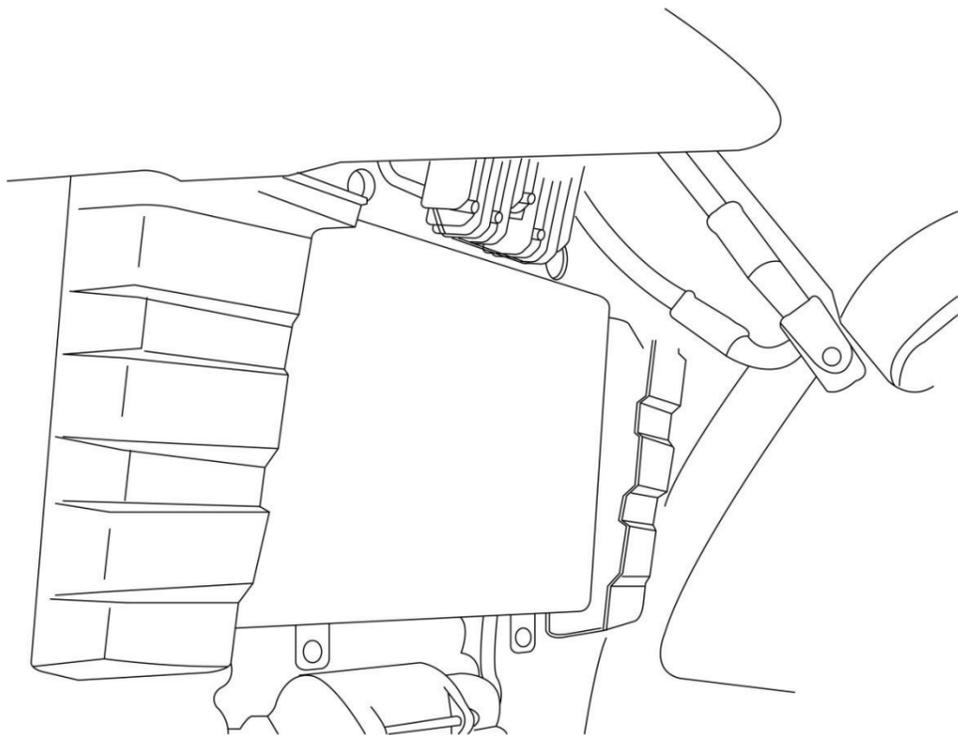



Step 1:

The drawing on the left shows the Radiator, before mounting of the SRC Radiator Guard.

The OE Washer and Bolt (Intended for mounting a Thermal Shield), has to be removed for fitment of the SRC Radiator Guard.

Step 2:


Orient and Align the Radiator Guard (1), the OE Bolt and Washer (2 off on each), Slide-in the Washer M5 – 2 off (2) and Screw M5 x 10 -2 off (3), as shown in the drawing.

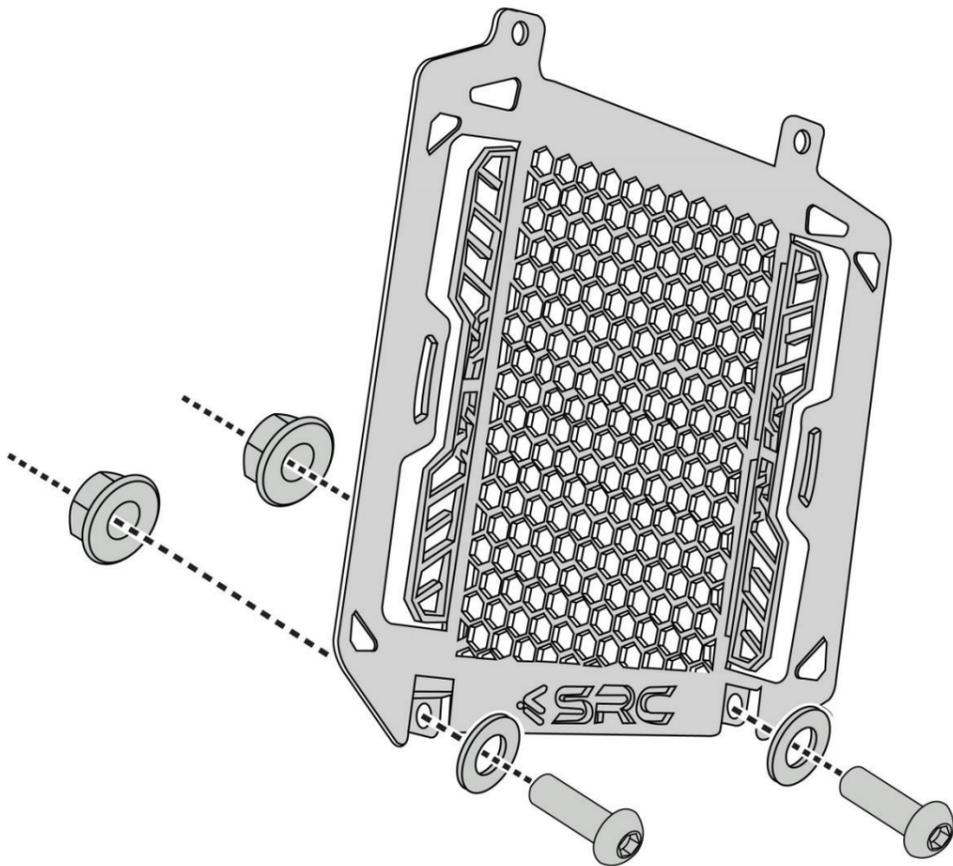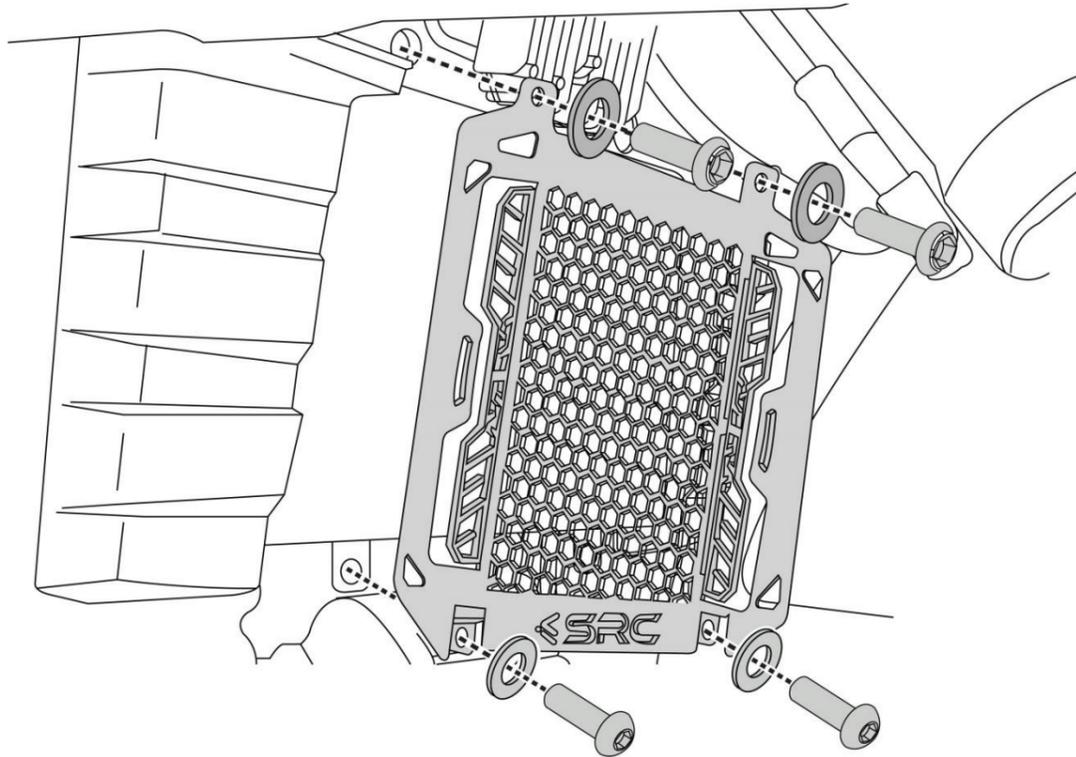

Step 3:

Slide-in the M5 Nut – 2 off (4) to the back side of the Radiator Guard and secure the threads on the M5 x 10 screw and tighten it fully.

The Top screws are to be tightened as well.

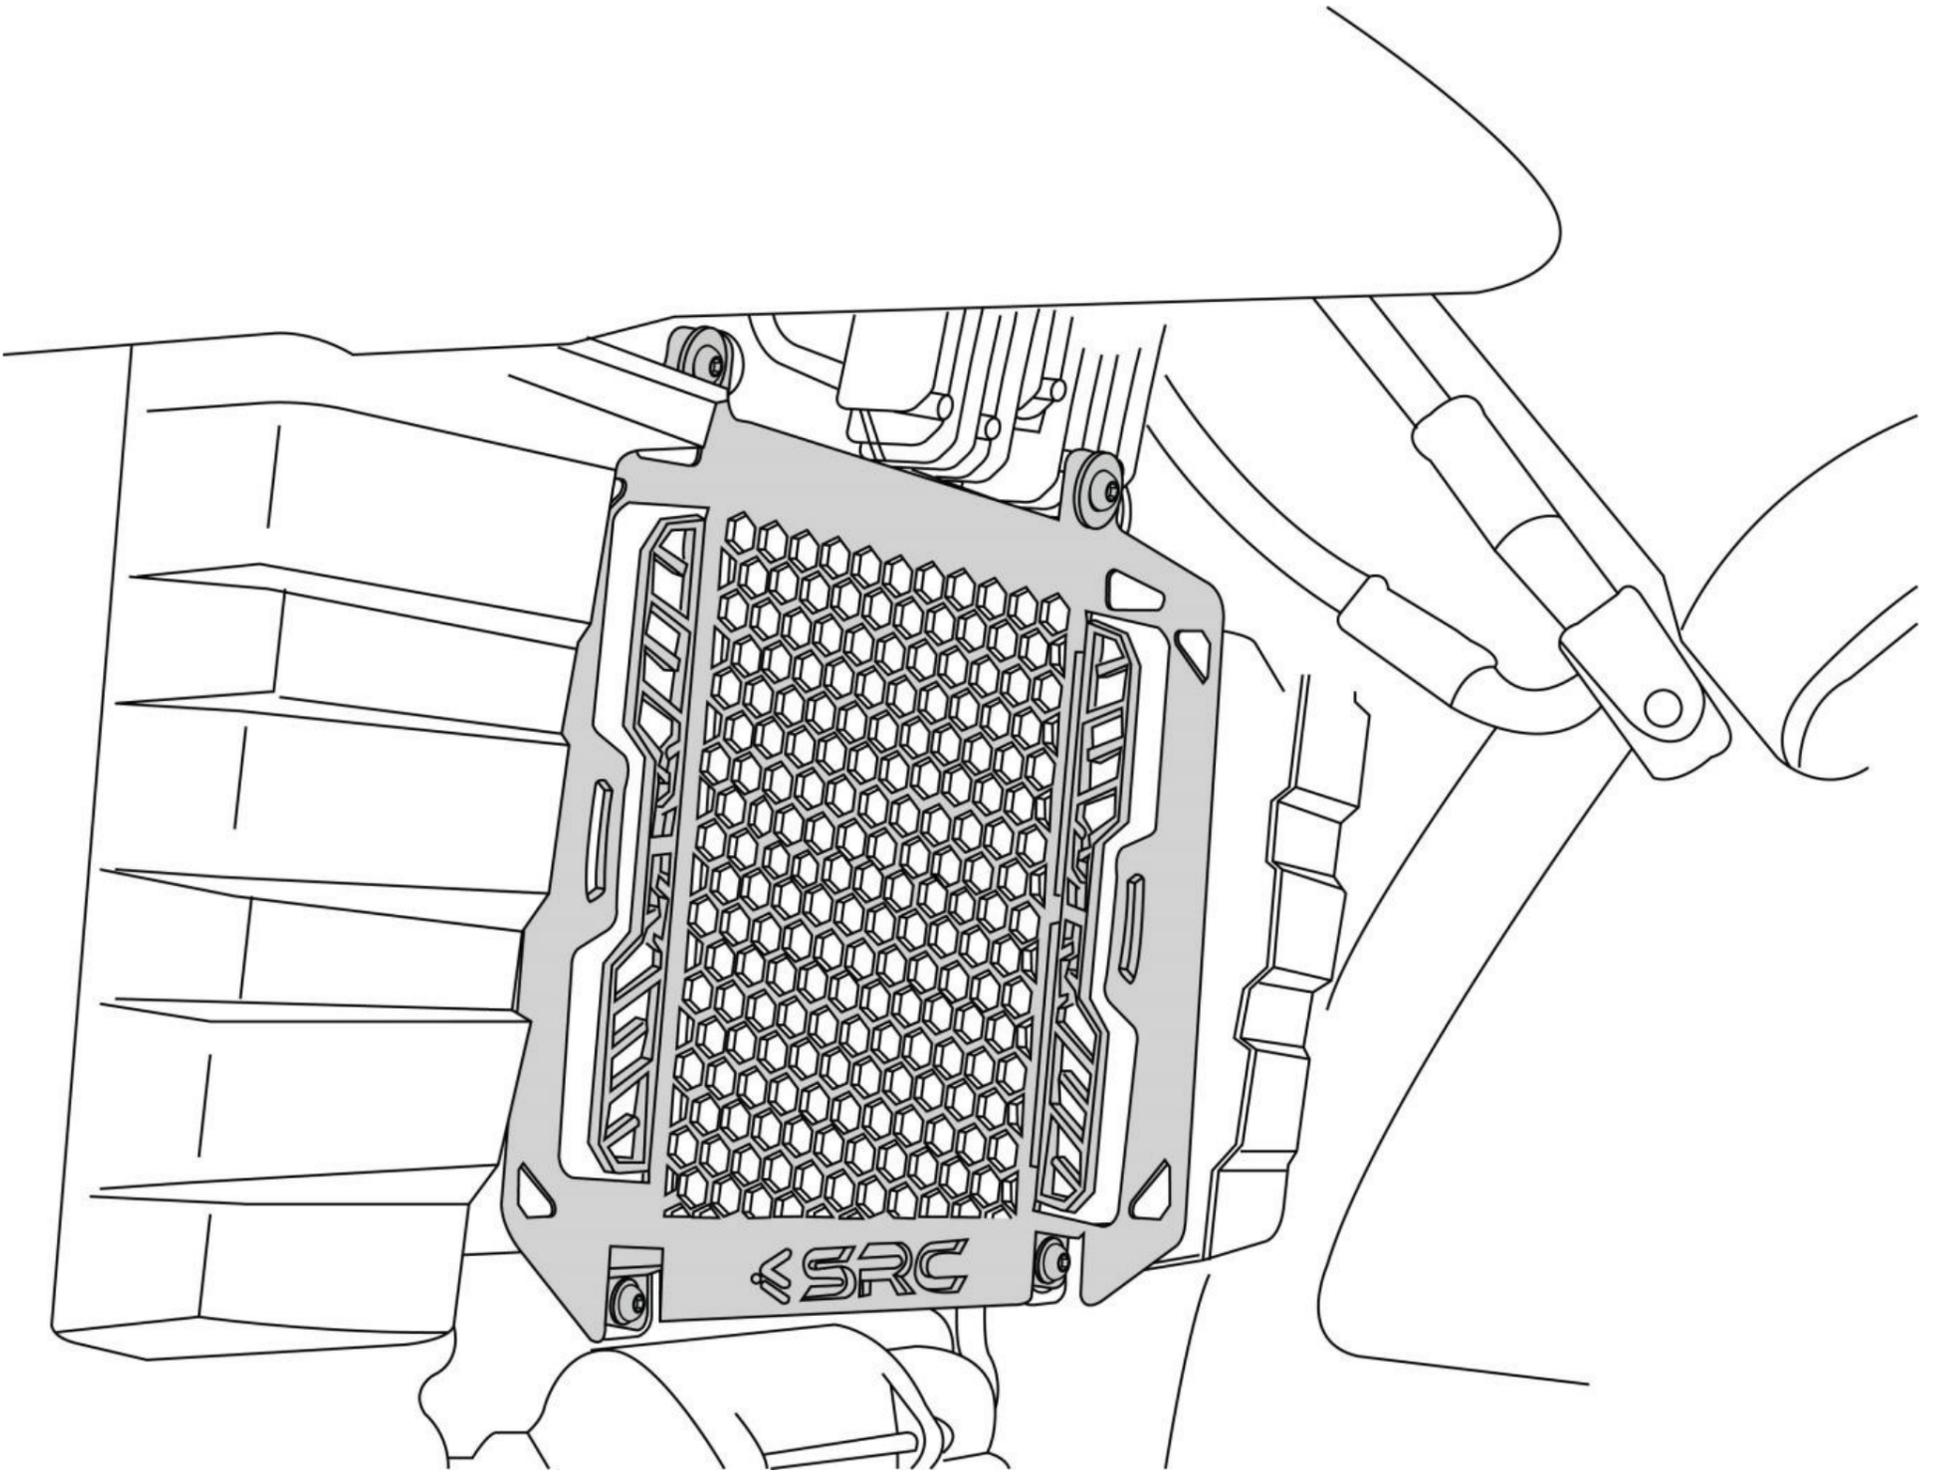

**Final mounted condition of Radiator Guard,
is as shown in the drawing.**

General Instructions

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. After Completion of the Mounting and before taking on a First ride, Ensure and Check all functions of the Vehicle. It is always advised to check loosening of the fasteners after the first 50 kilo meters of ride and at regular intervals.
7. We are showing here the Scope of Supply/ Installation/Parts list & BOM from SRC
8. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
9. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets.