


Scope of Supply/Bill of Material & Mounting Drawings

Part Number: H-CB500X-02-01-SL / H-CB500X-02-02





Part Description: Radiator Guard – HONDA CB500 X

Installation / Parts List / Bill of Material for Mounting


NO.	Description	Quantity	Torque * (N-M)	Remarks **
1	Radiator Guard	1		
2	Washer M6	2		
3	Screw M6 X 20	2	9 -10	Use Liquid Thread Locker
SRC Design uses Metric System of Measurement and all dimensions in Millimeters				
* Recommended to use the Torque specified in the table				
** Denotes Usage of Liquid Thread Locker in specified Locations				

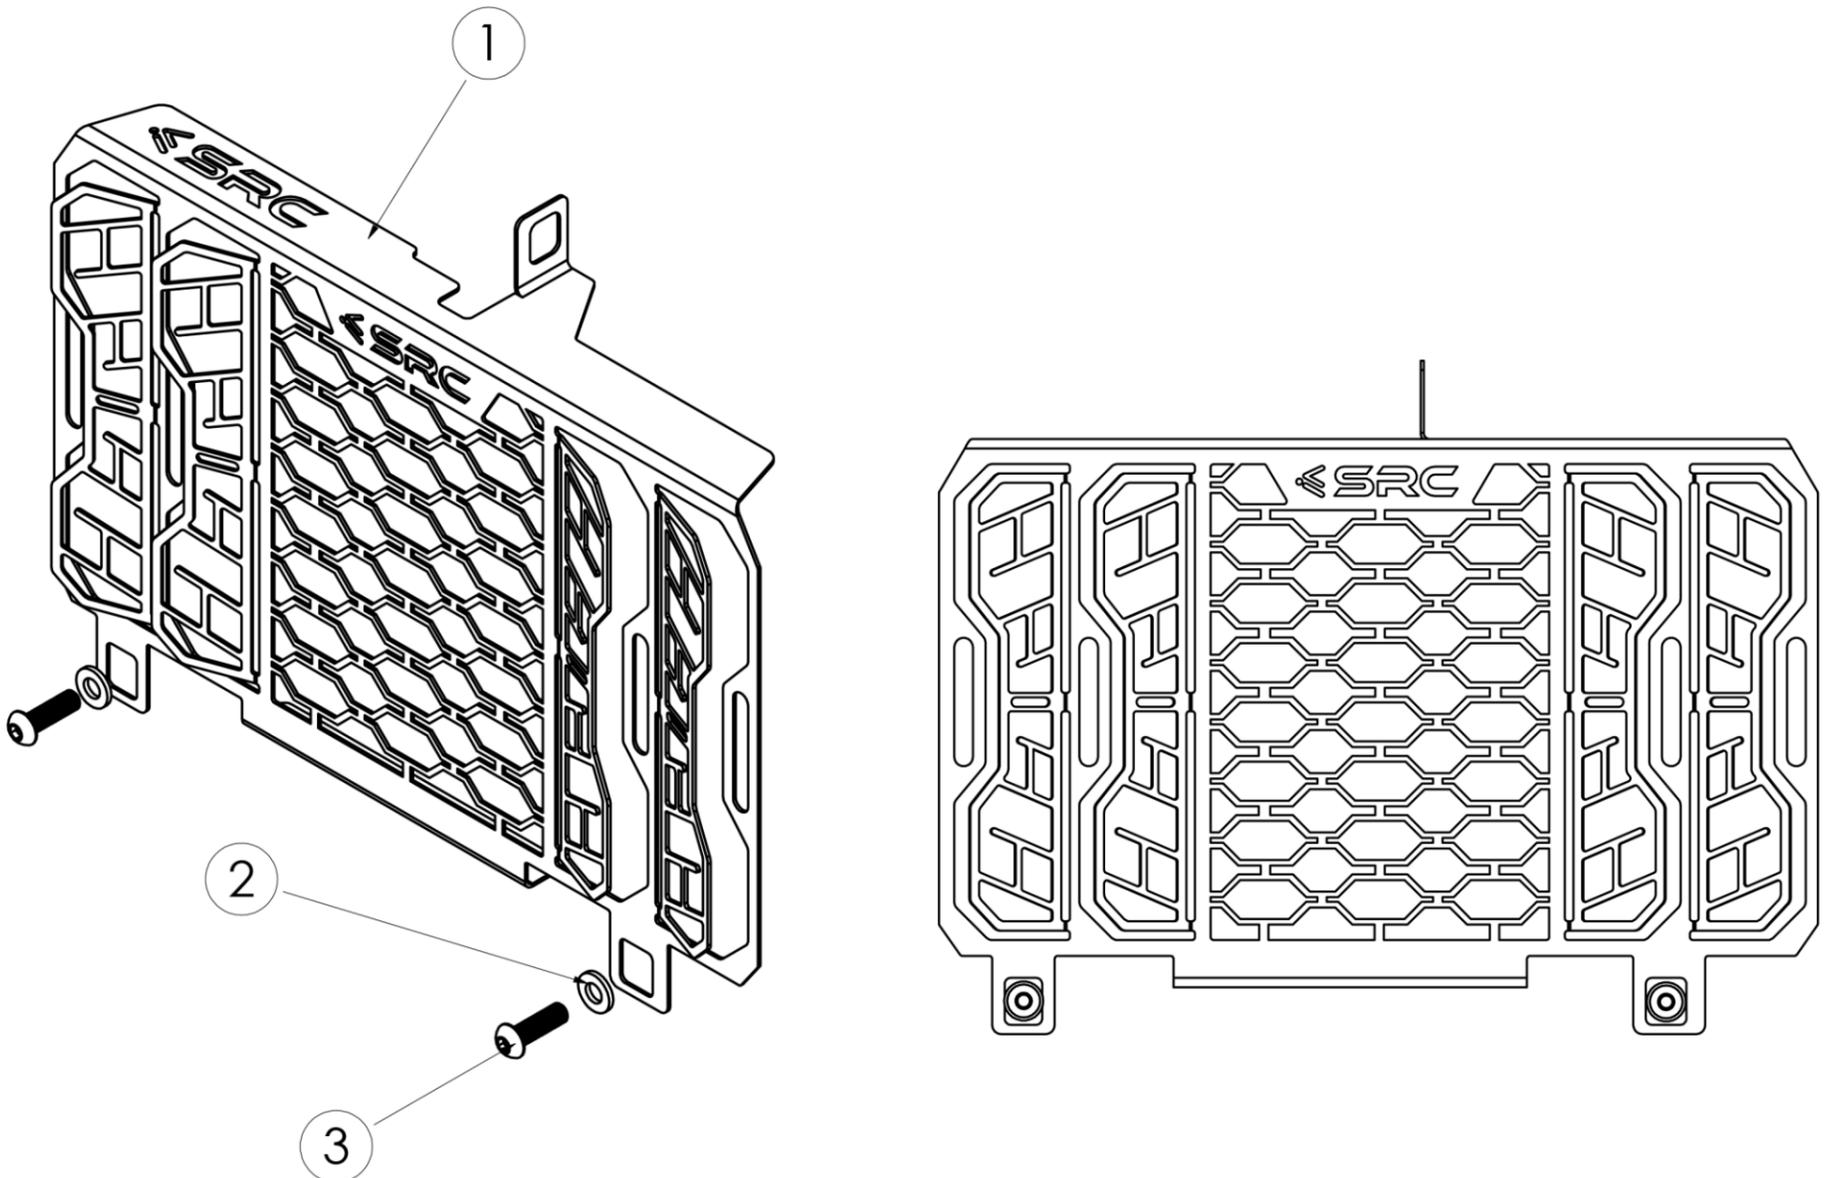


MOUNTING DRAWINGS

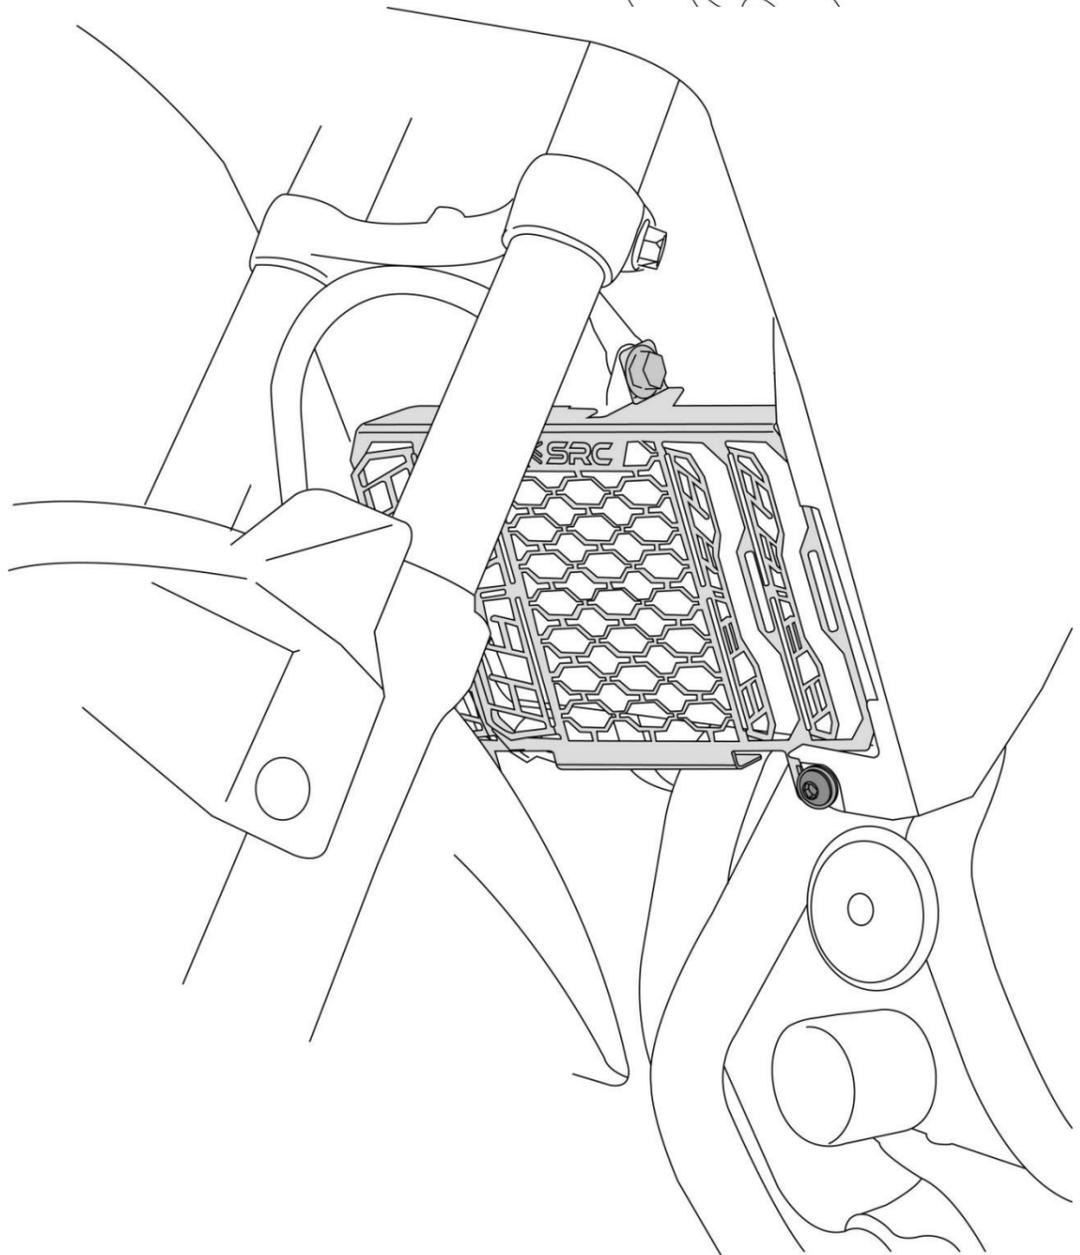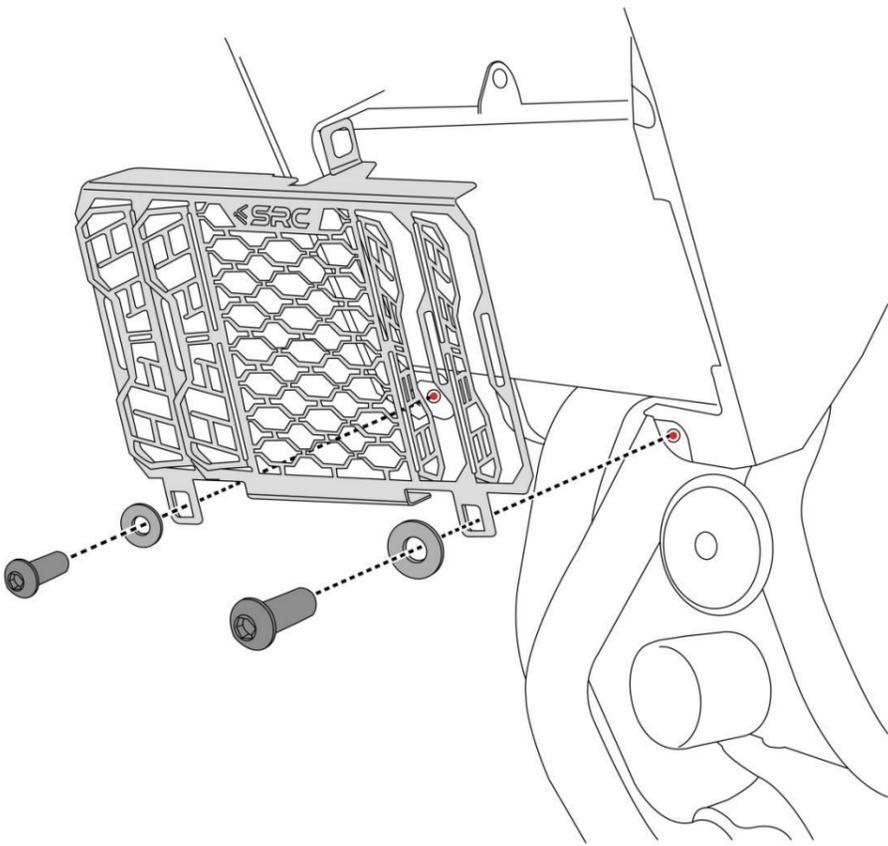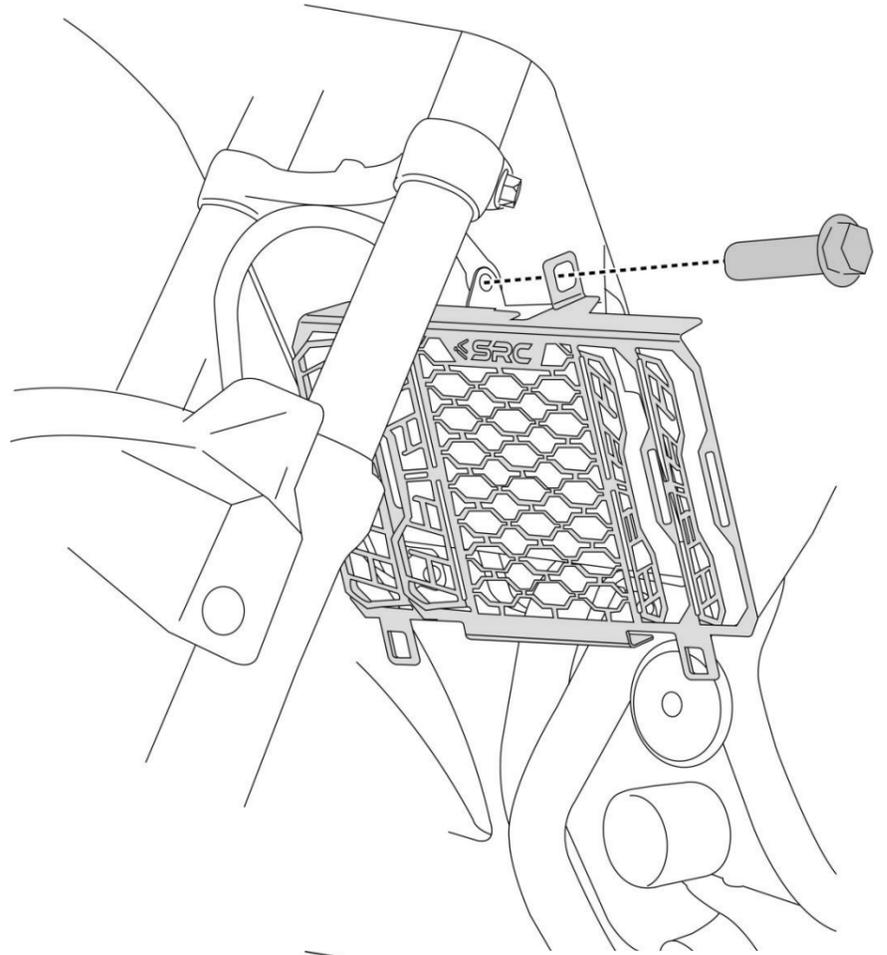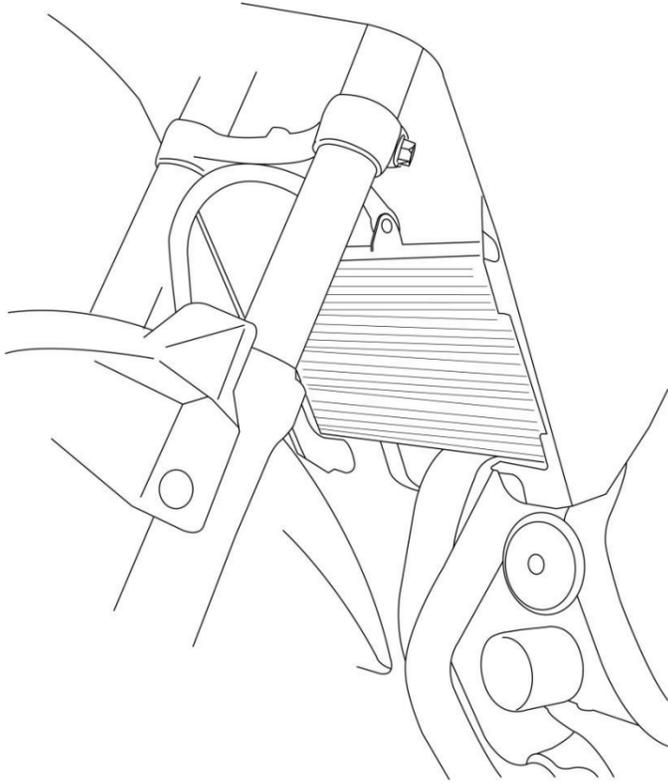

Mounting Instructions

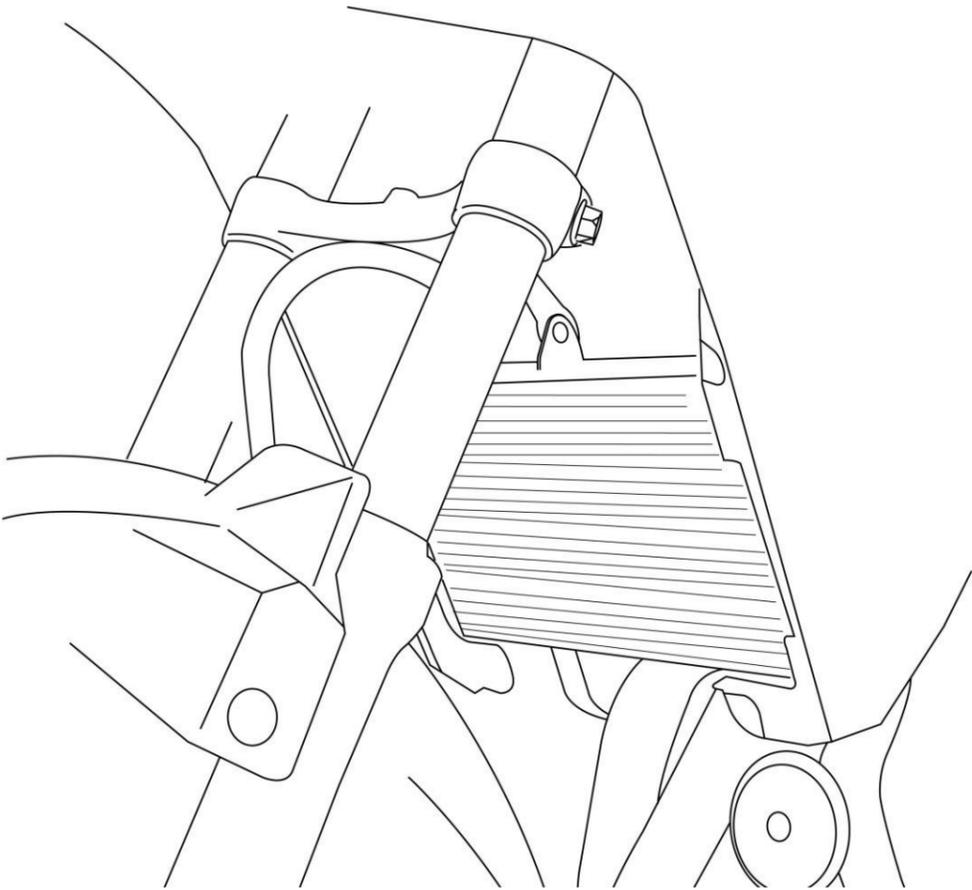


Step 1:
For mounting the Radiator Guard, remove the Mounting bolt holding the top of the Radiator, as shown in the drawing.

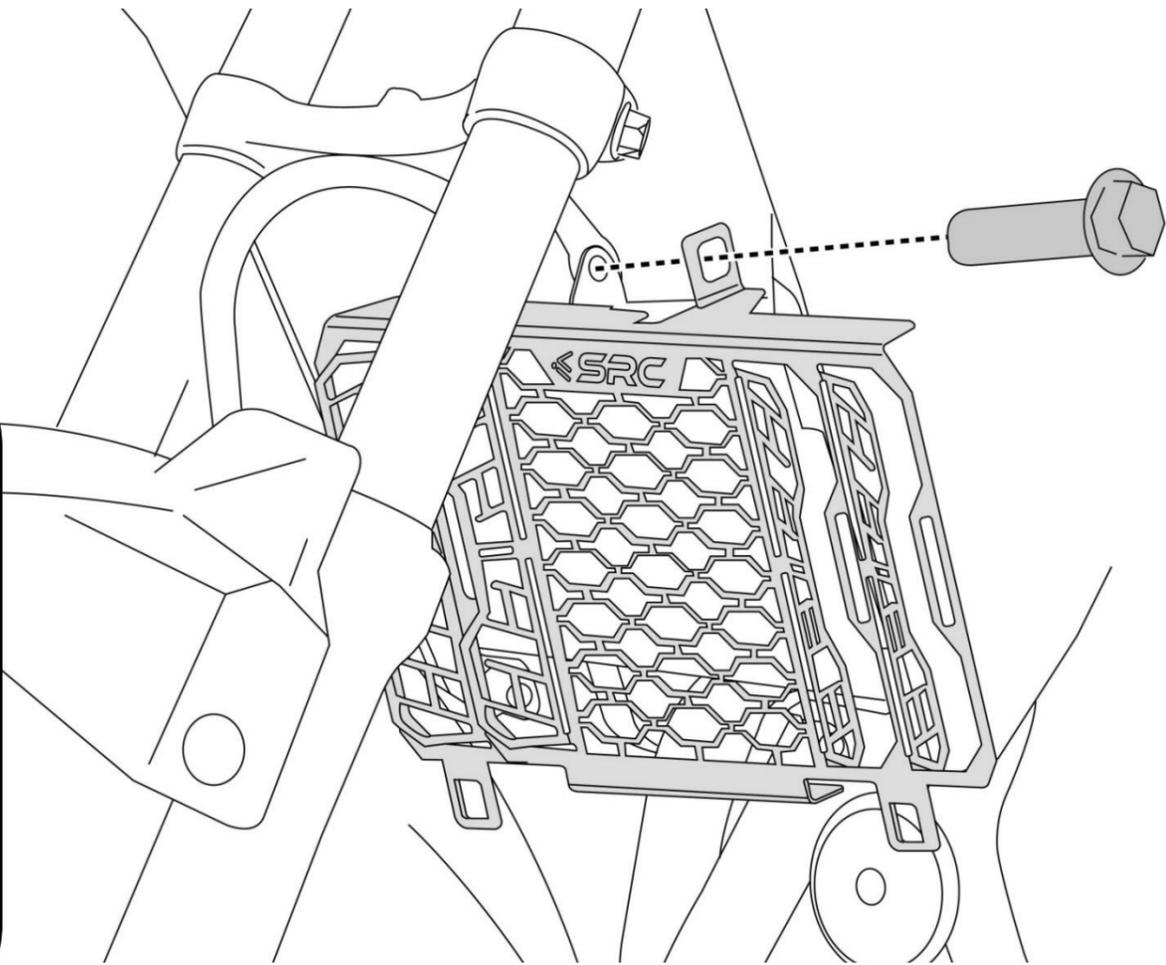

Step 2:
Orient the Radiator Guard, in-line with the mounting hole and slide-in the OE Bolt, and secure the threads in the frame bracket, holding the Radiator.

Step 3:


Through the bottom side holes of the Radiator Guard, slide-in the Washer M6 (2) and Screw M6 x 20 (3), and secure the threads on the mounting holes, near the bottom of the Radiator.

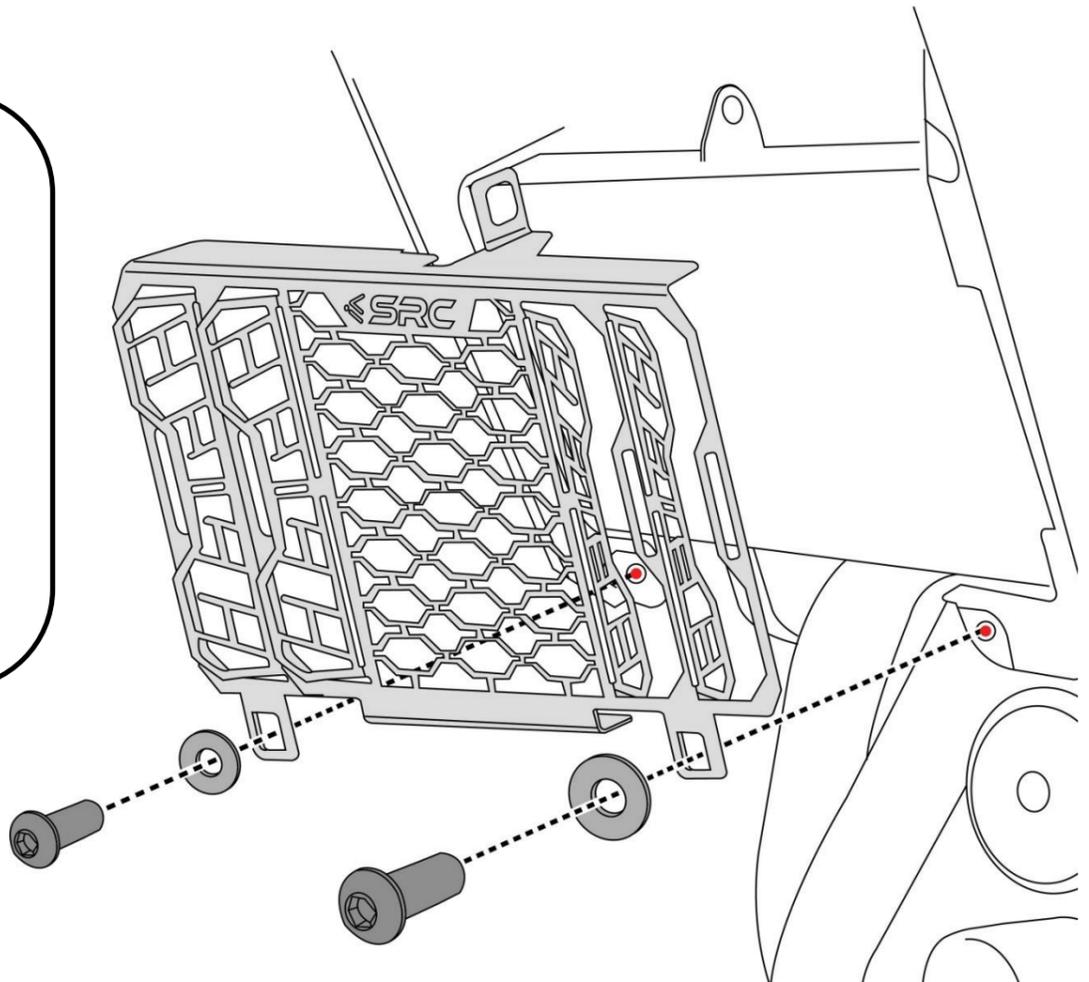

Step 4:

Ensure the Guard is not fouling with any outside surfaces of the Radiator and on the outside with the Twin frames, and tighten the screws to the torque, as shown in the BOM table.

Radiator Guard is shown in “Final Mounted condition”

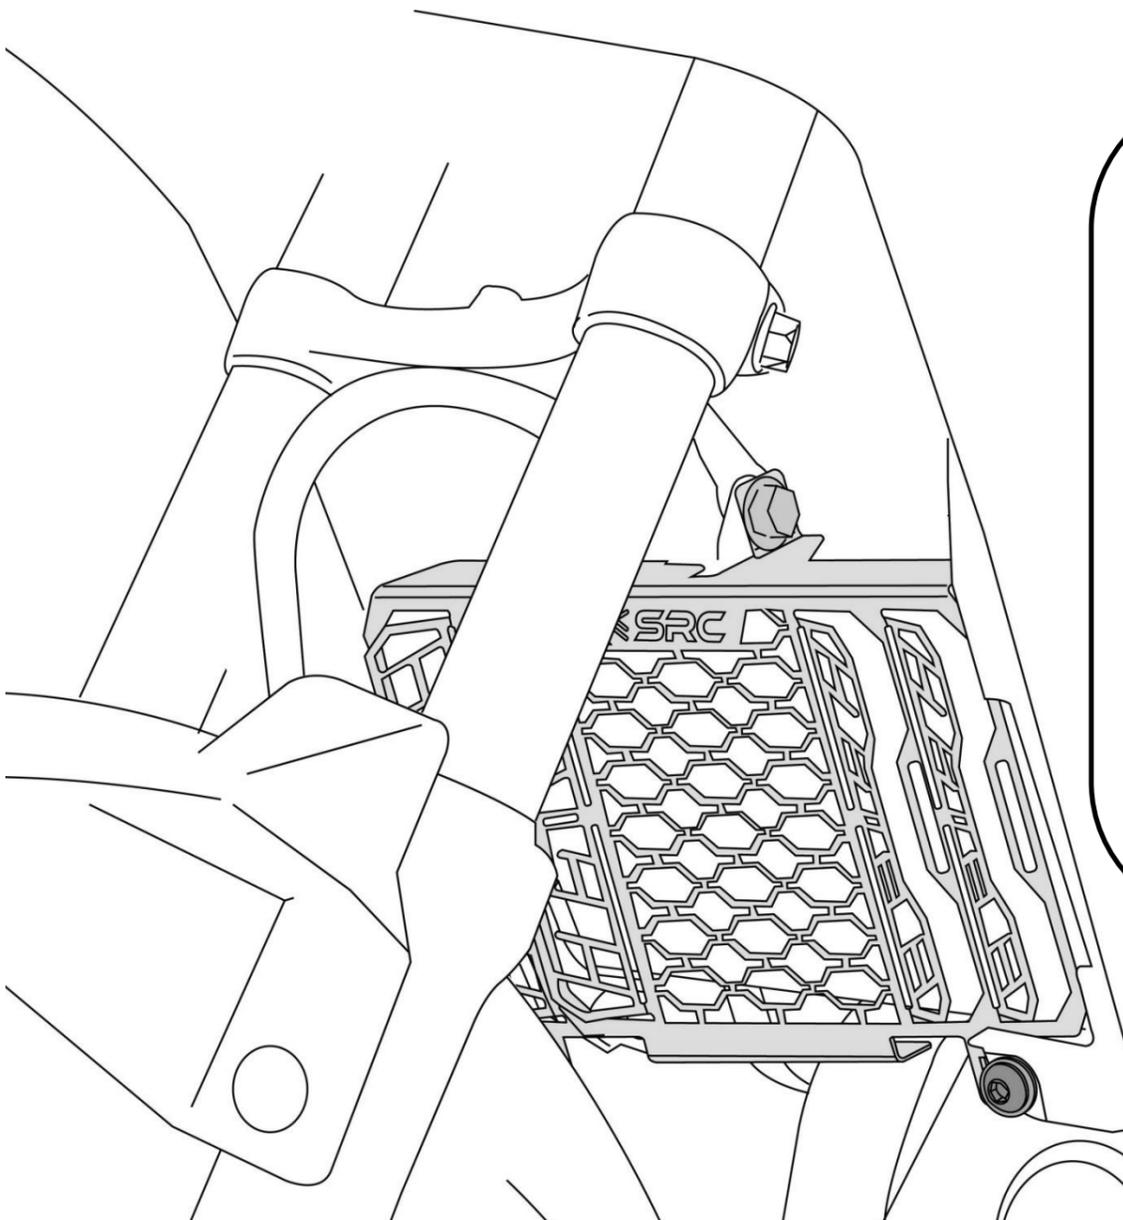

General Instructions

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. After Completion of the Mounting and before taking on a First ride, Ensure and Check all functions of the Vehicle. It is always advised to check loosening of the fasteners after the first 50 kilo meters of ride and at regular intervals.
7. We are showing here the Scope of Supply/ Installation/Parts list & BOM from SRC
8. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
9. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets.