

Scope of Supply/Bill of Material & Mounting Drawings

Part Number: Y-T700-01-01-SL / Y-T700-01-02

Part Description: Head Light Guard – YAMAHA TENERE 700


Installation / Parts List / Bill of Material for Mounting

NO.	Description	Quantity	Torque * (N-M)	Remarks **	Check List
1	Head Light Guard	1			
2	Bracket A	1			
3	Taper Ring M5	4			
4	Countersink Screw M5 X 25	4	5 - 6	Use Liquid Thread Locker	
5	Mountinh Pin	4			
6	Grommet	4			
7	Washer M5	4			
8	Delrin M5 15X3 mm	4			
9	Screw M5 X 10	4	5 - 6	Use Liquid Thread Locker	





SRC Design uses Metric System of Measurement and all dimensions in Millimeters

* Recommended to use the Torque specified in the table


** Denotes Usage of Liquid Thread Locker in specified Locations

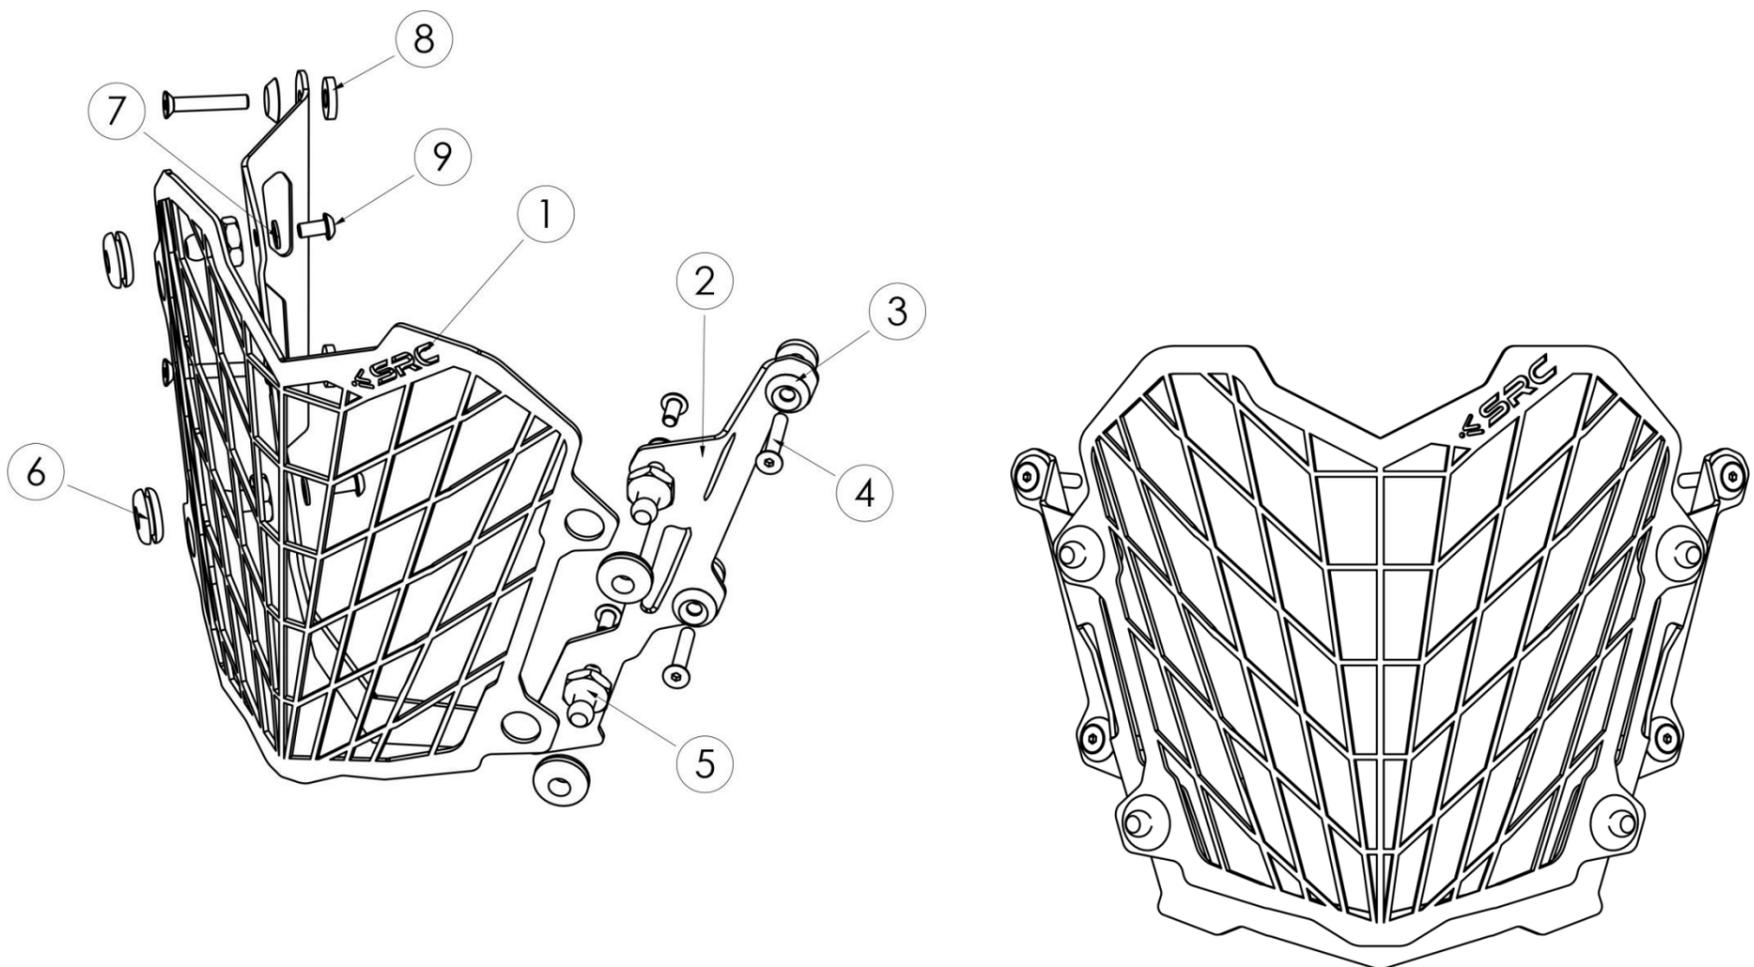

MOUNTING DRAWINGS

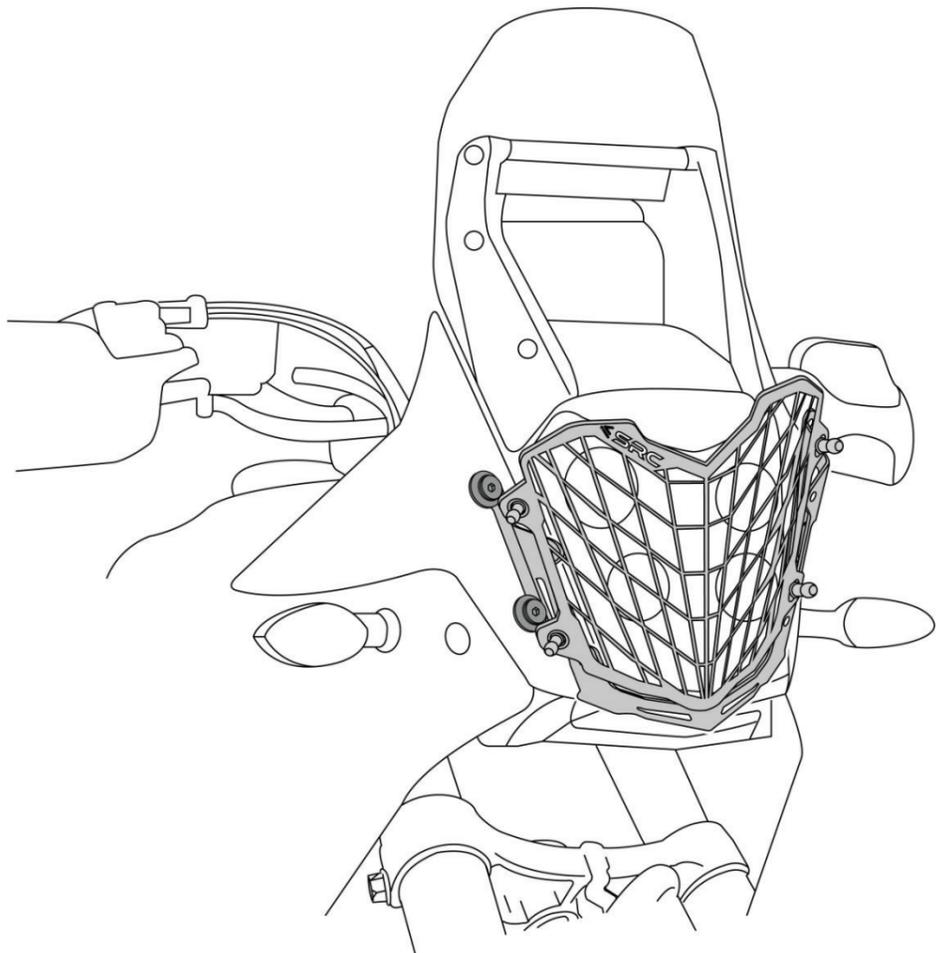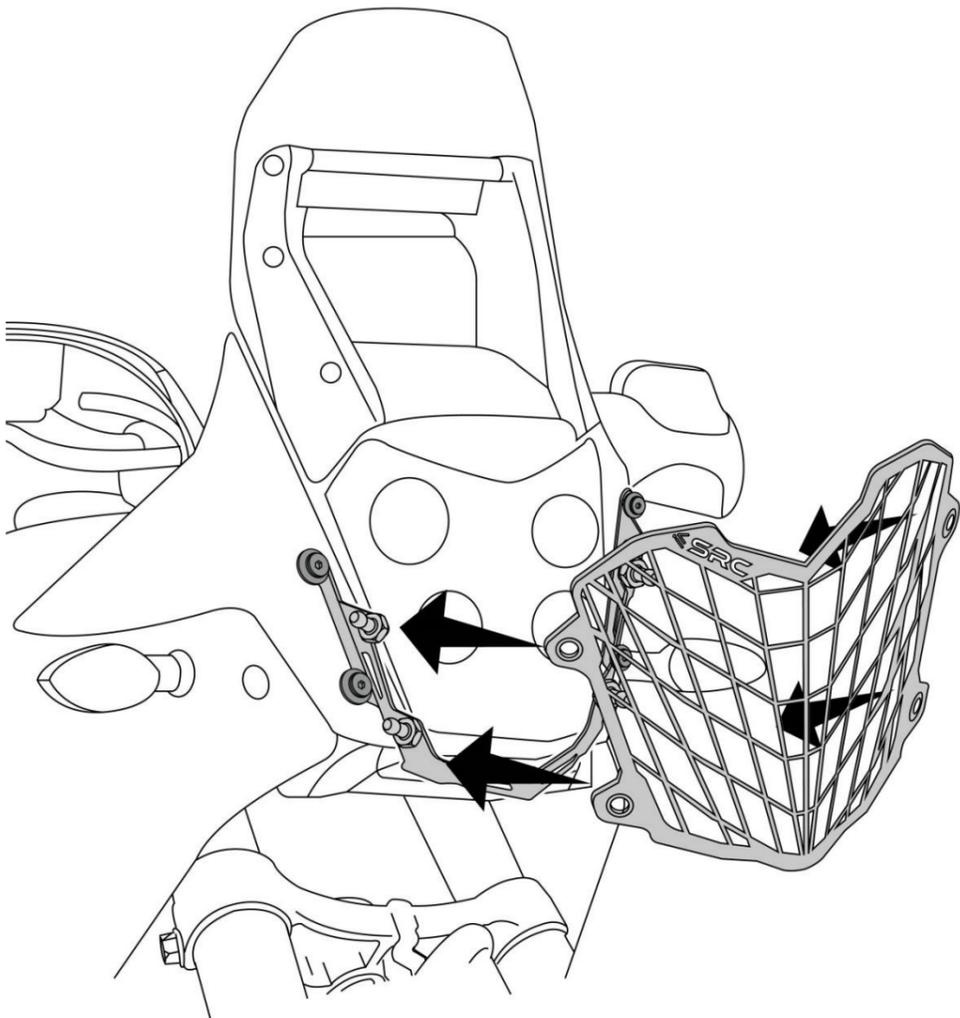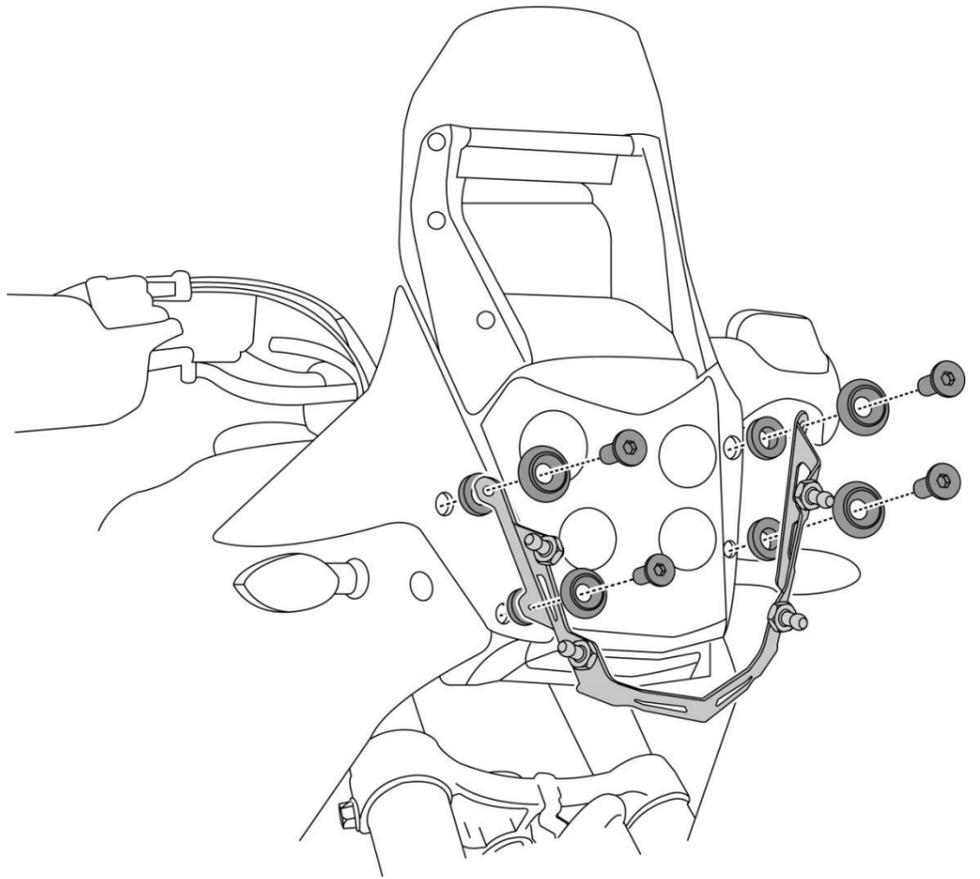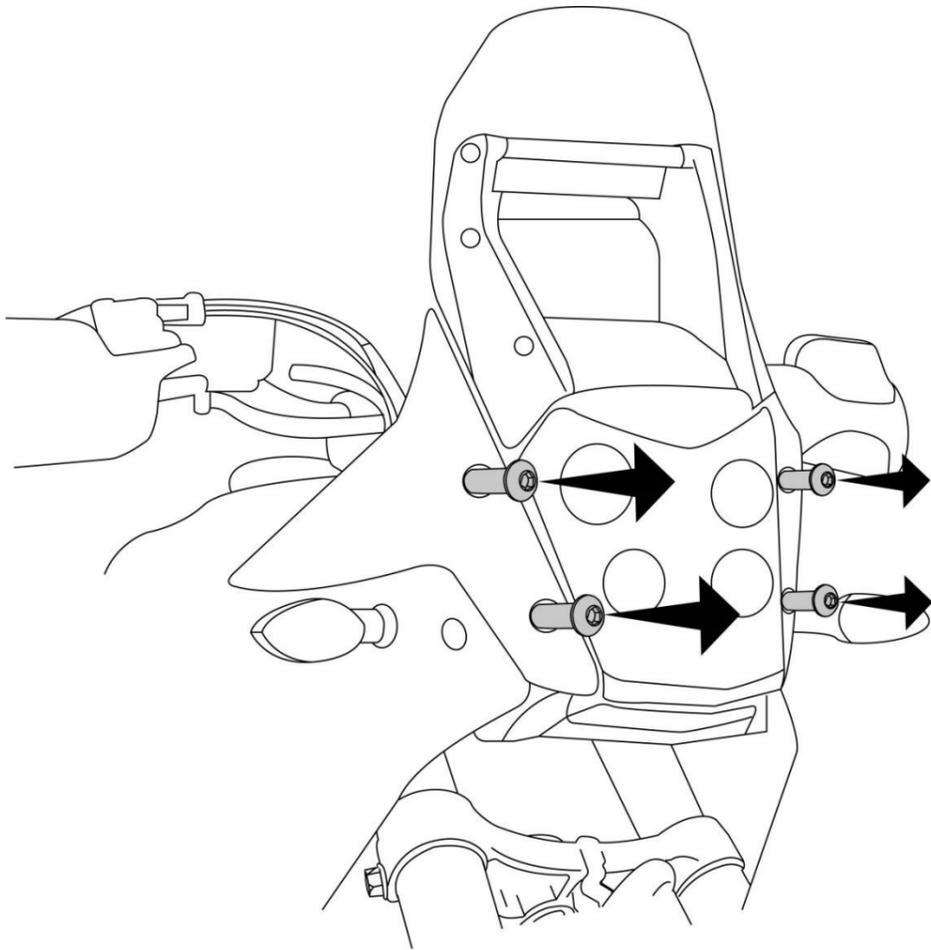

Mounting Instructions

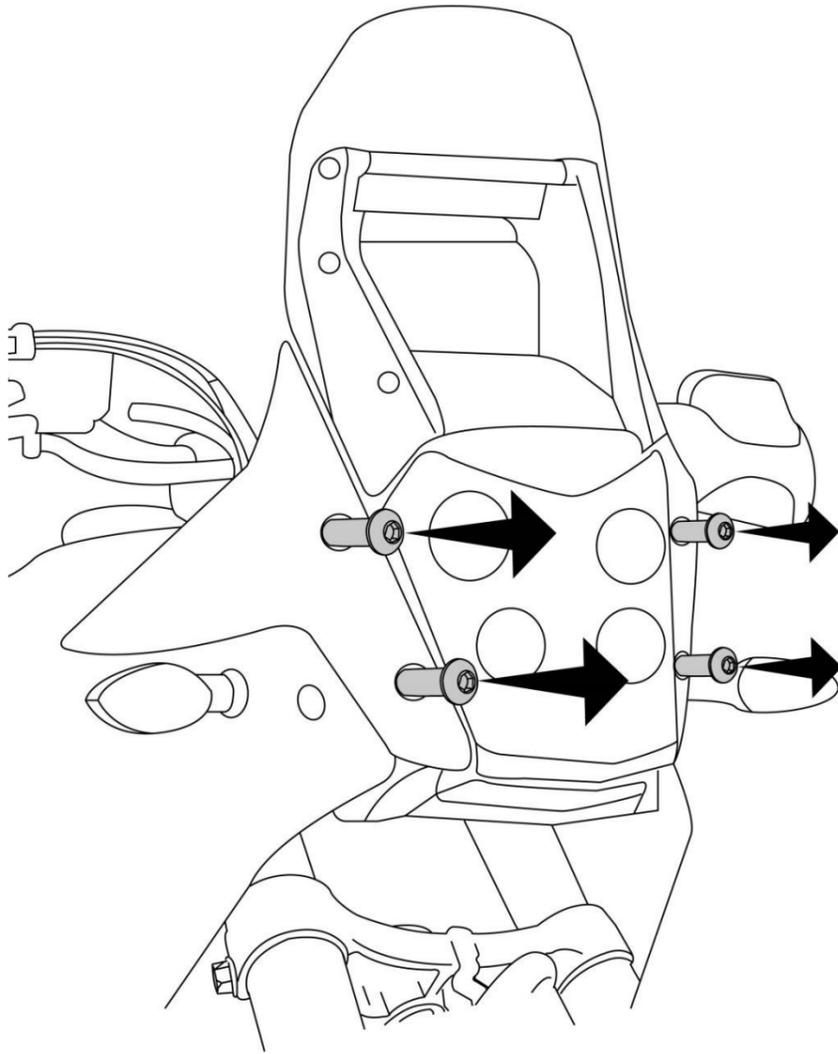


STEP 1 :


Unscrew the mounting screws and remove.

STEP 2 :

Orient the Bracket A (2) in-line with the Mounting Holes of the OE Bracket (as shown) and slip-in the Taper Ring M5 (3) –4off, Screw M5 x 25 (4) –4off, Delrin Bush M5 (8) – 4 off in positions as shown and secure the threads.


The Mounting Pin (5) – 4 off can be assembled to the Bracket. The same can be assembled Off-line too.

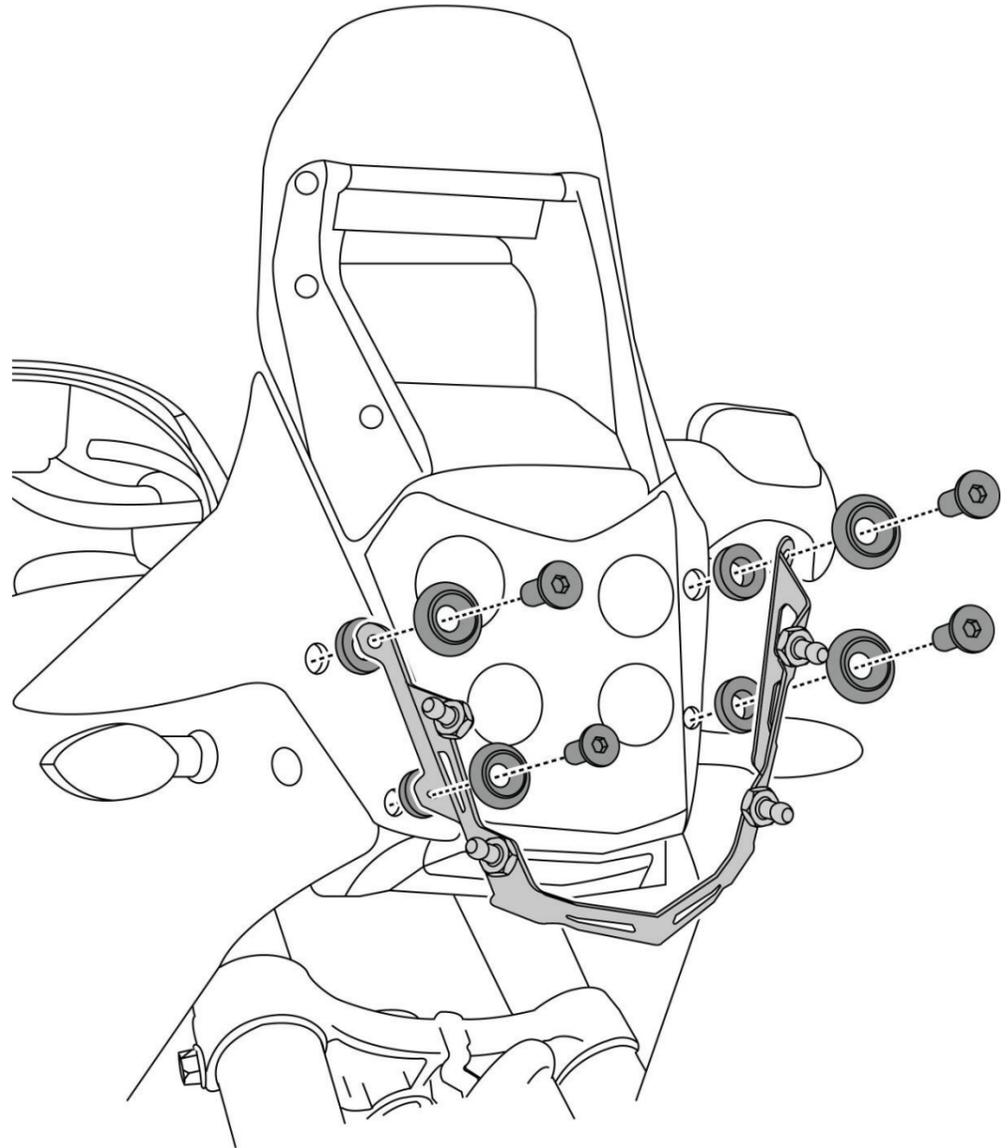

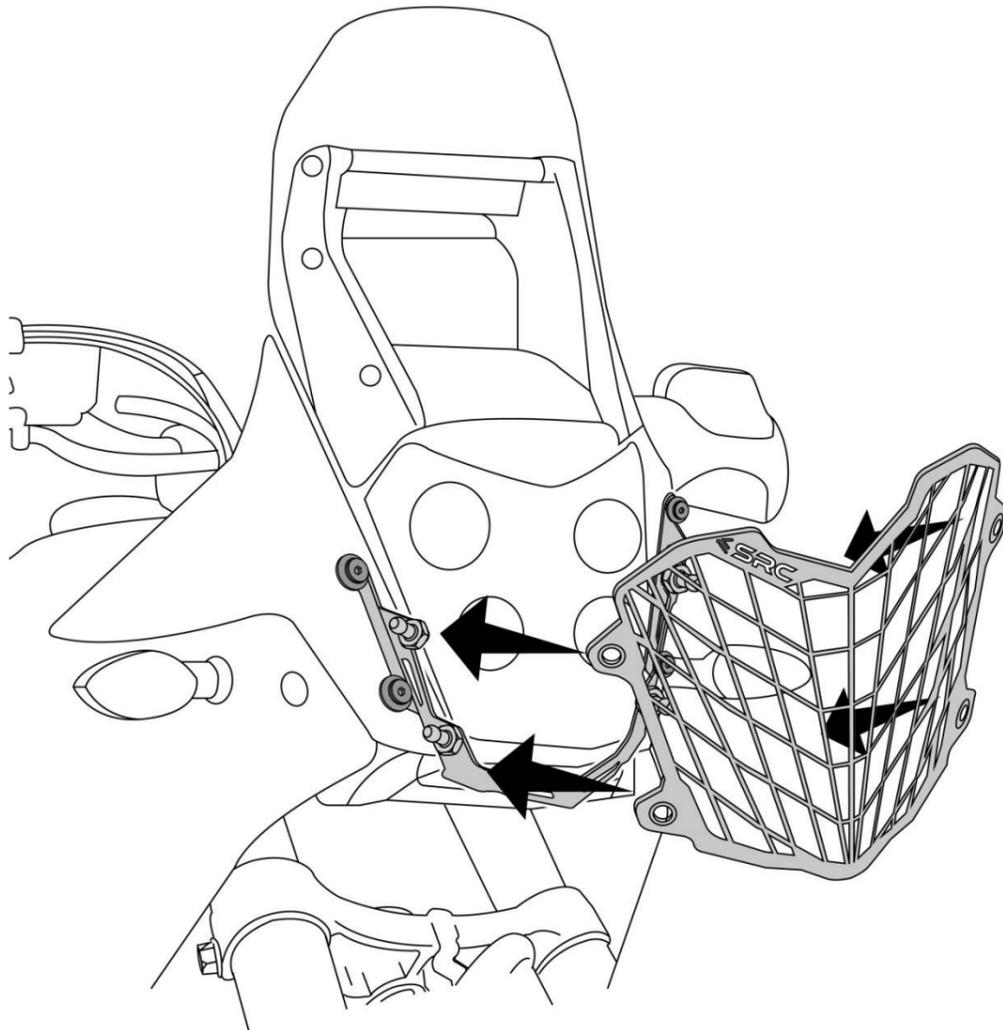

STEP 3 :

Orient the Head Light Guard (1), as shown. Assemble the Grommet (6) hugging and flush, with the outer surfaces of the Head Light Guard and holding on to the Mounting Pins, projecting out of the Bracket A

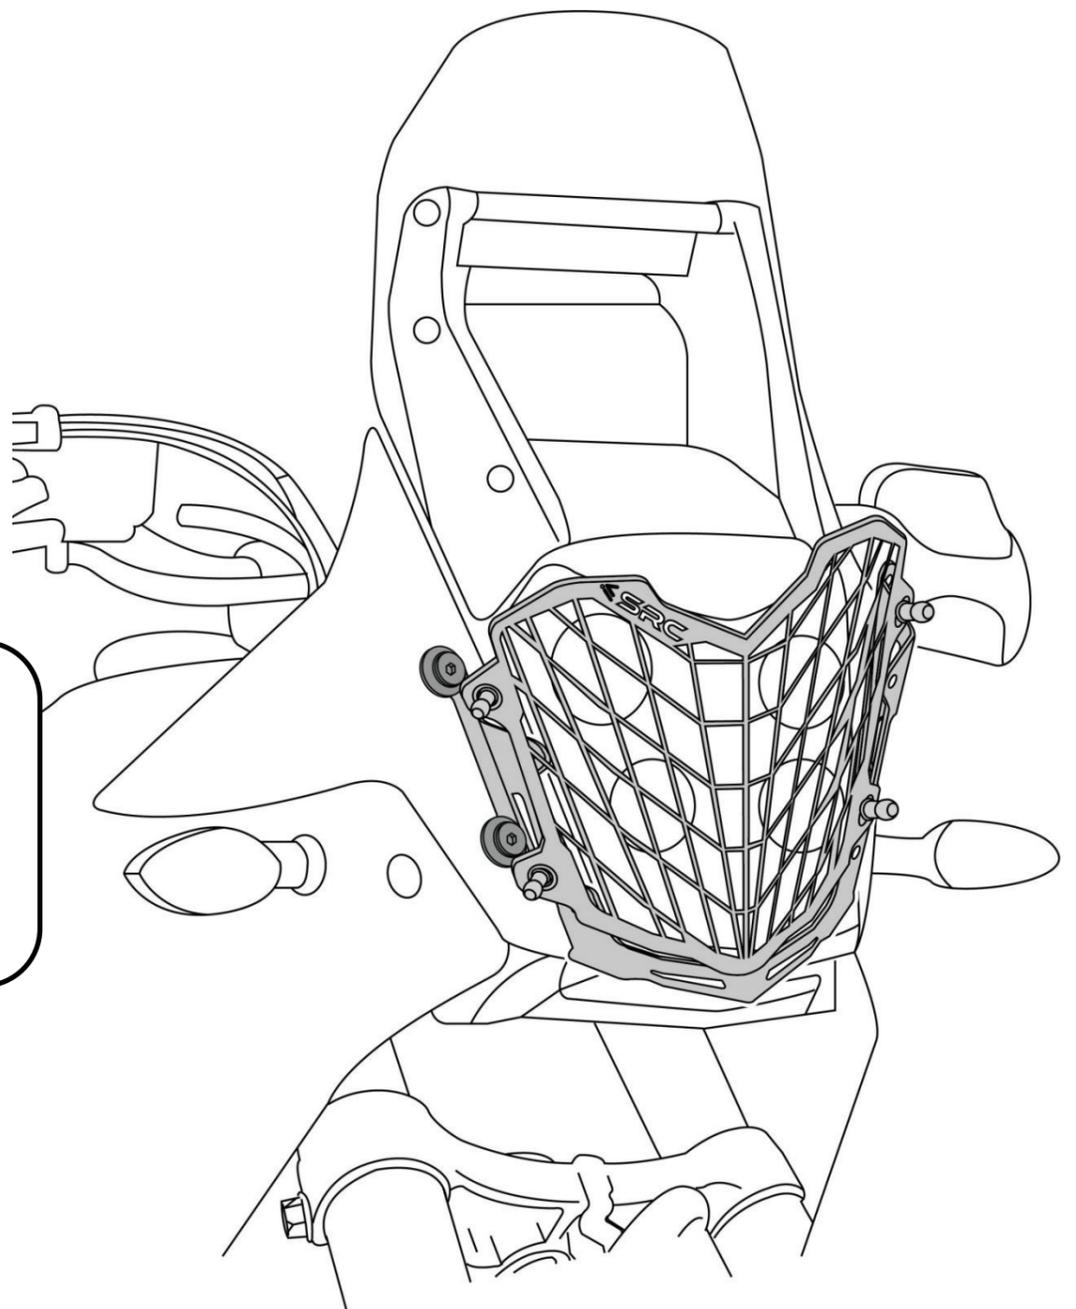

The Installation of the Head Light Guard is complete and is as shown



General Instructions

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. After Completion of the Mounting and before taking on a First ride, Ensure and Check all functions of the Vehicle. It is always advised to check loosening of the fasteners after the first 50 kilo meters of ride and at regular intervals.
7. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
8. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets