

Scope of Supply/Bill of Material & Mounting Drawings

Part Number: K-VS1000/20-01-01-SL / K-VS1000/20-01-02

Part Description: Head Light Guard – KAWASAKI VERSYS 1000 (20 – 21)


Installation / Parts List / Bill of Material for Mounting

NO.	Description	Quantity	Torque * (N-M)	Remarks **	Check List
1	Head Light Guard	1			
2	Hex sockt button head M5x6	2	5 - 6	Use Liquid Thread Locker	
3	Rubber Grommet	4			
4	Mounting Pin	4			
5	Bracket RH	1			
6	Spacer Bush	2			
7	Hex sockt button head M5x25	2	5 - 6	Use Liquid Thread Locker	
8	Hex sockt button head M5x10	4	5 - 6	Use Liquid Thread Locker	
9	Washer M5	8			
10	Bracket LH	1			
11	Rubber Tape	1			
12	Rubber Spacer	1			
13	Bracket Center	1			


SRC Design uses Metric System of Measurement and all dimensions in Millimeters

* Recommended to use the Torque specified in the table

** Denotes Usage of Liquid Thread Locker in specified Locations

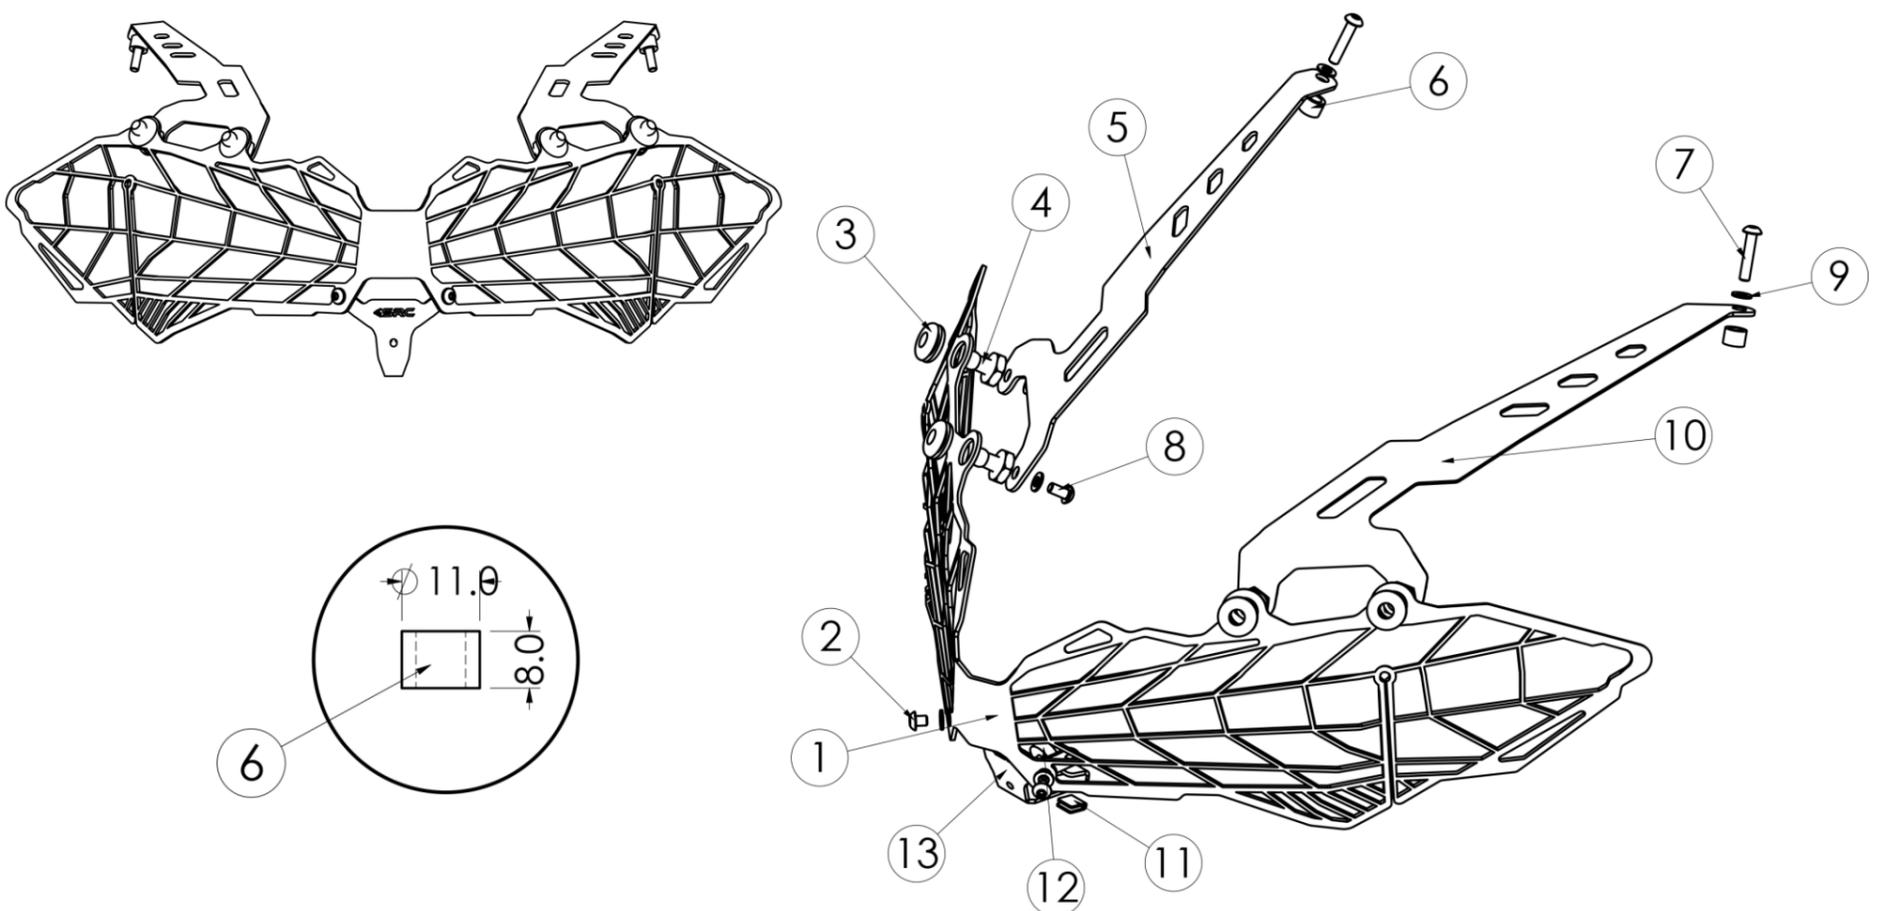


MOUNTING DRAWINGS

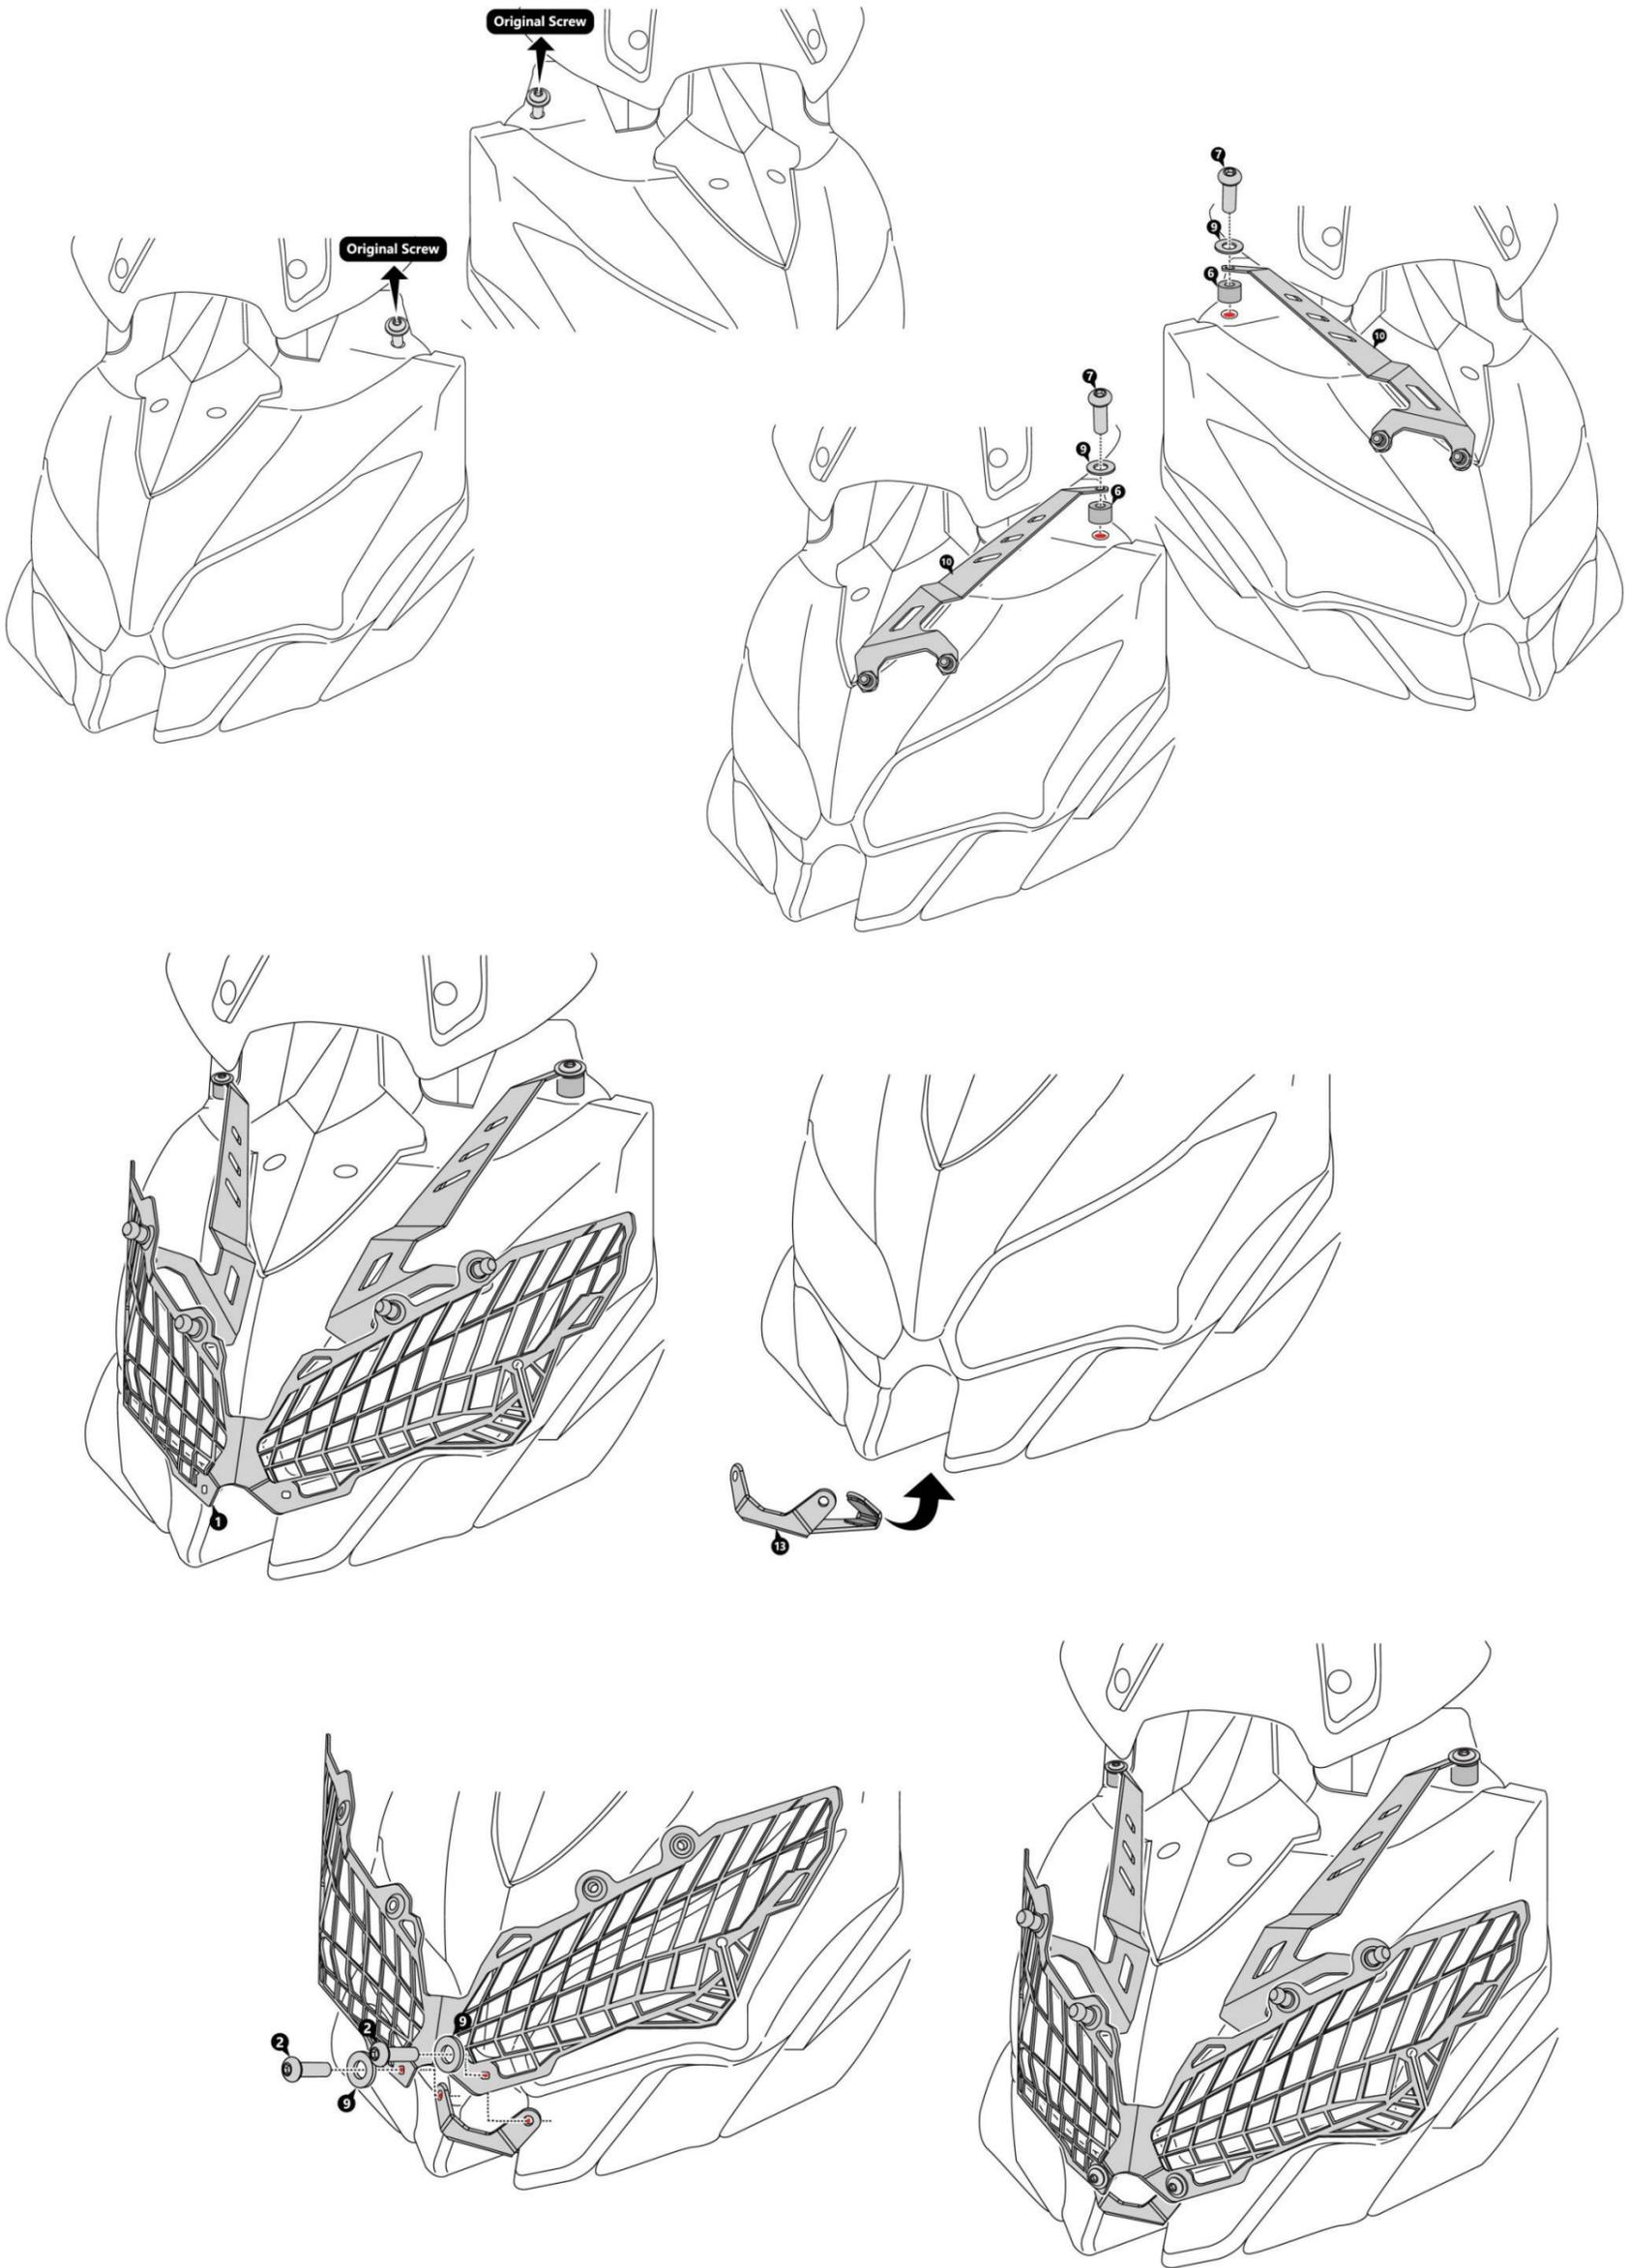


Mounting Instructions

Step 1:
Unscrew Remove the Original Screw 2 off, as shown in the drawing.

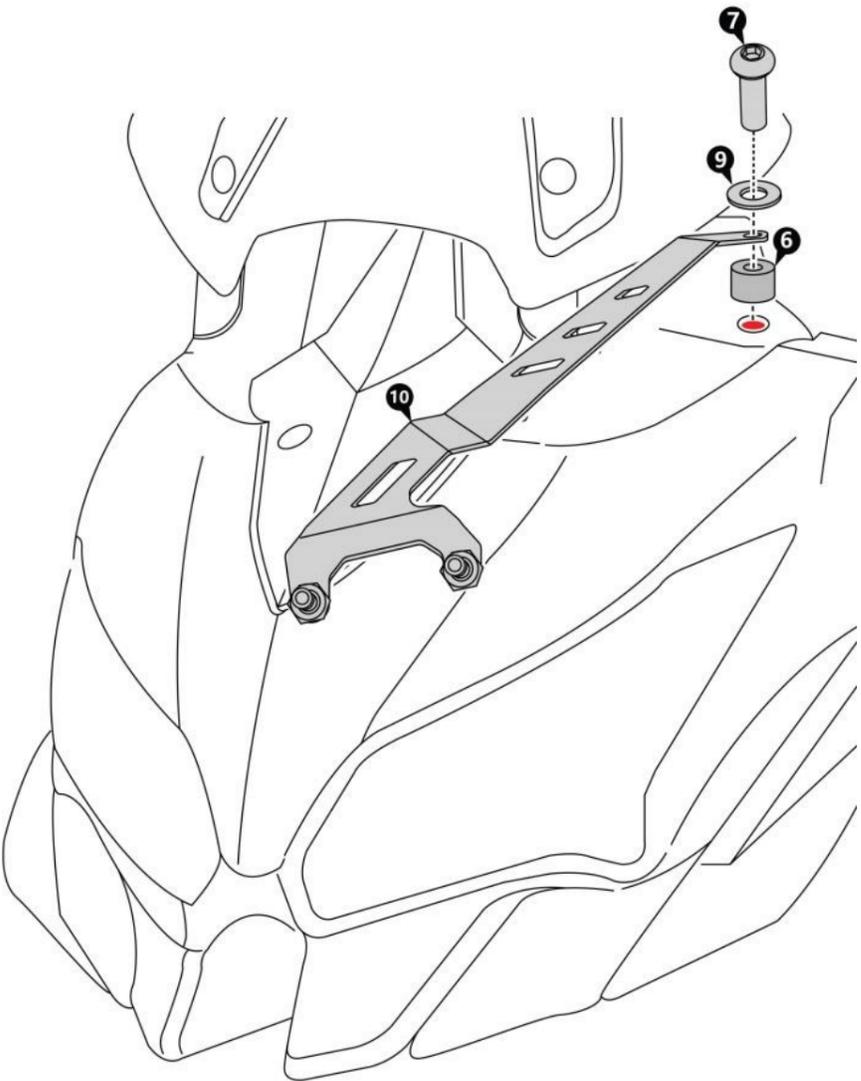


Step 2:
Orient and Align the Bracket LH (10) in-line with the Mounting holes, (as shown) of the OE Bracket and slip-in the Washer M5 (9) – 1off, Screw M5 x 25 (7) – 1 off, Bush Delrin (6) – 1off,in positions as shown and secure the threads.

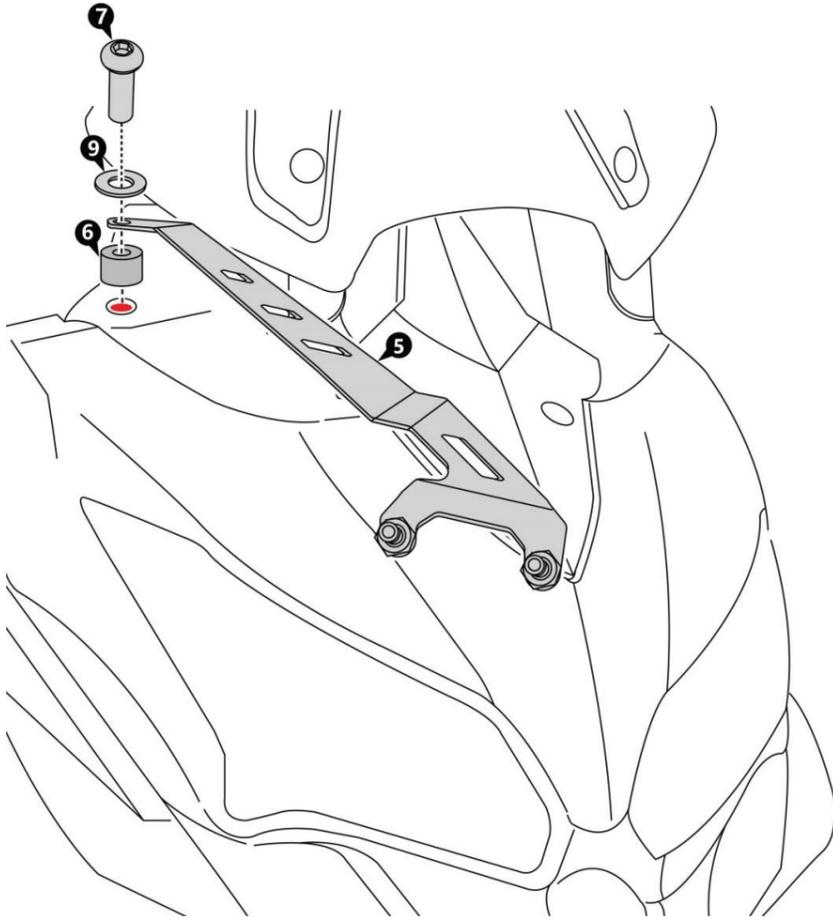

Step 3:
Repeat the Step 2 for mounting the Bracket RH (5), as shown


“As is mounted condition” of Head Light Guard is as shown in the drawing to the right.

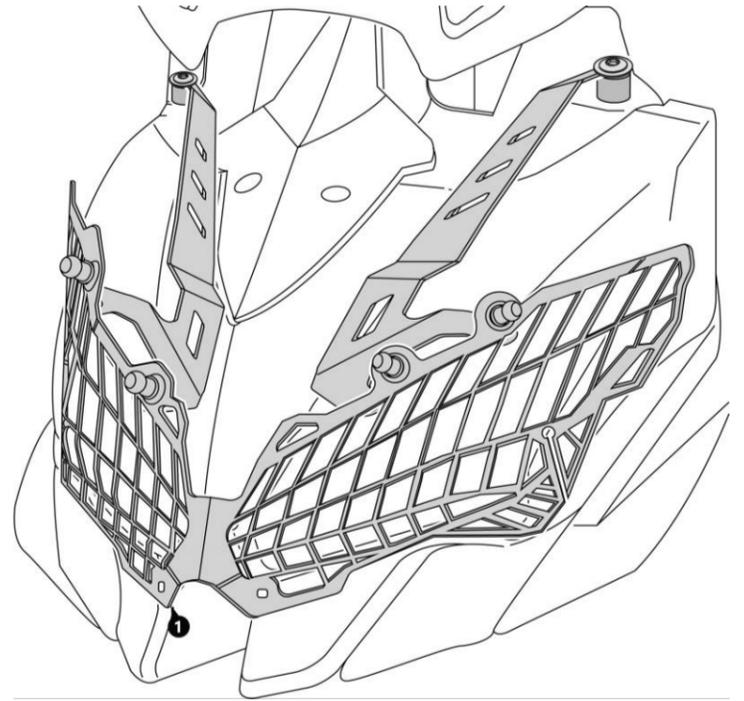

Step 4:


Orient and Align the Bracket Center (13) – 1 off, as shown.


The Bottom bracket will have a Rubber strip, which will be glued/affixed (as supplied by SRC), and the tongue like portion is hooked into the under side of the Metal cover. The Rubber strip prevents friction and scratches between metal to metal contact and also serves as a cushion.

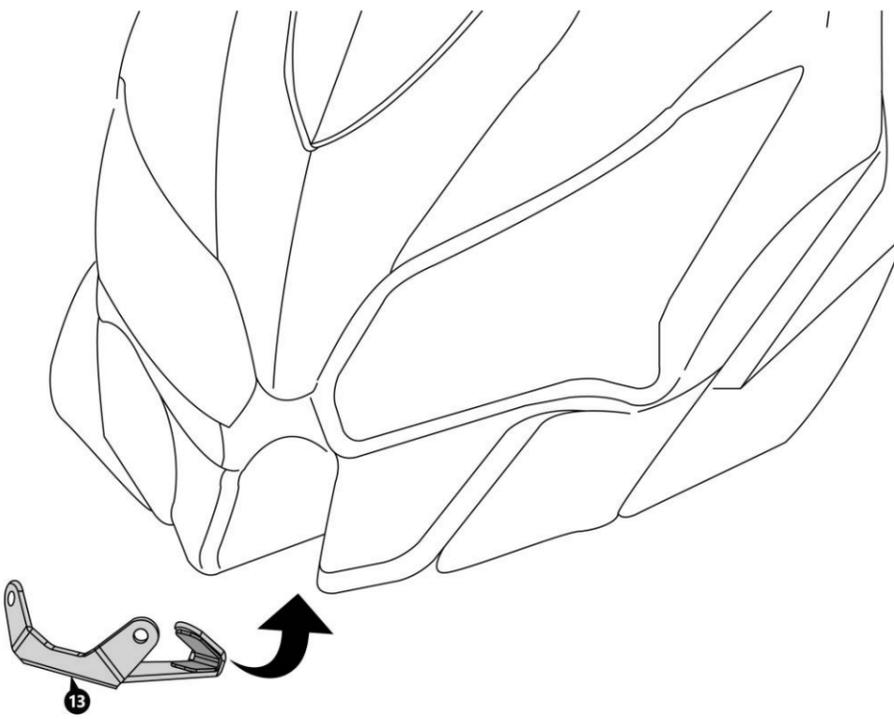

Step 5:

Slip-in the Screw M5 x 6 (2) – 2 off and Washer M5 (9) – 2 off from the front and secure the bottom side mounting holes in the Head Light Guard (1) to the Bottom bracket (13).

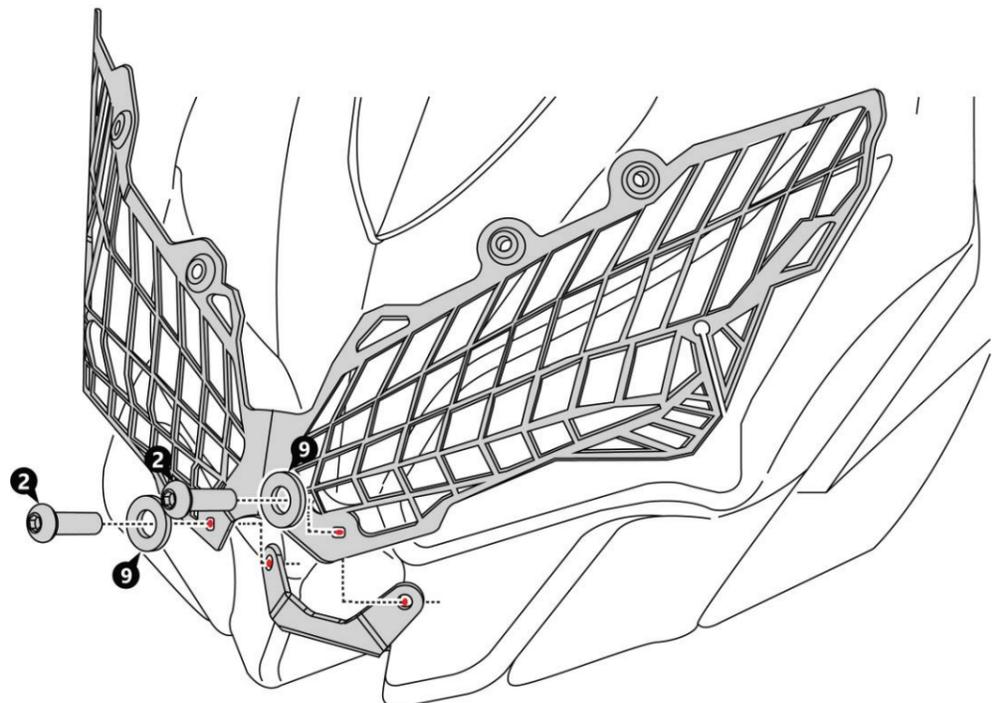

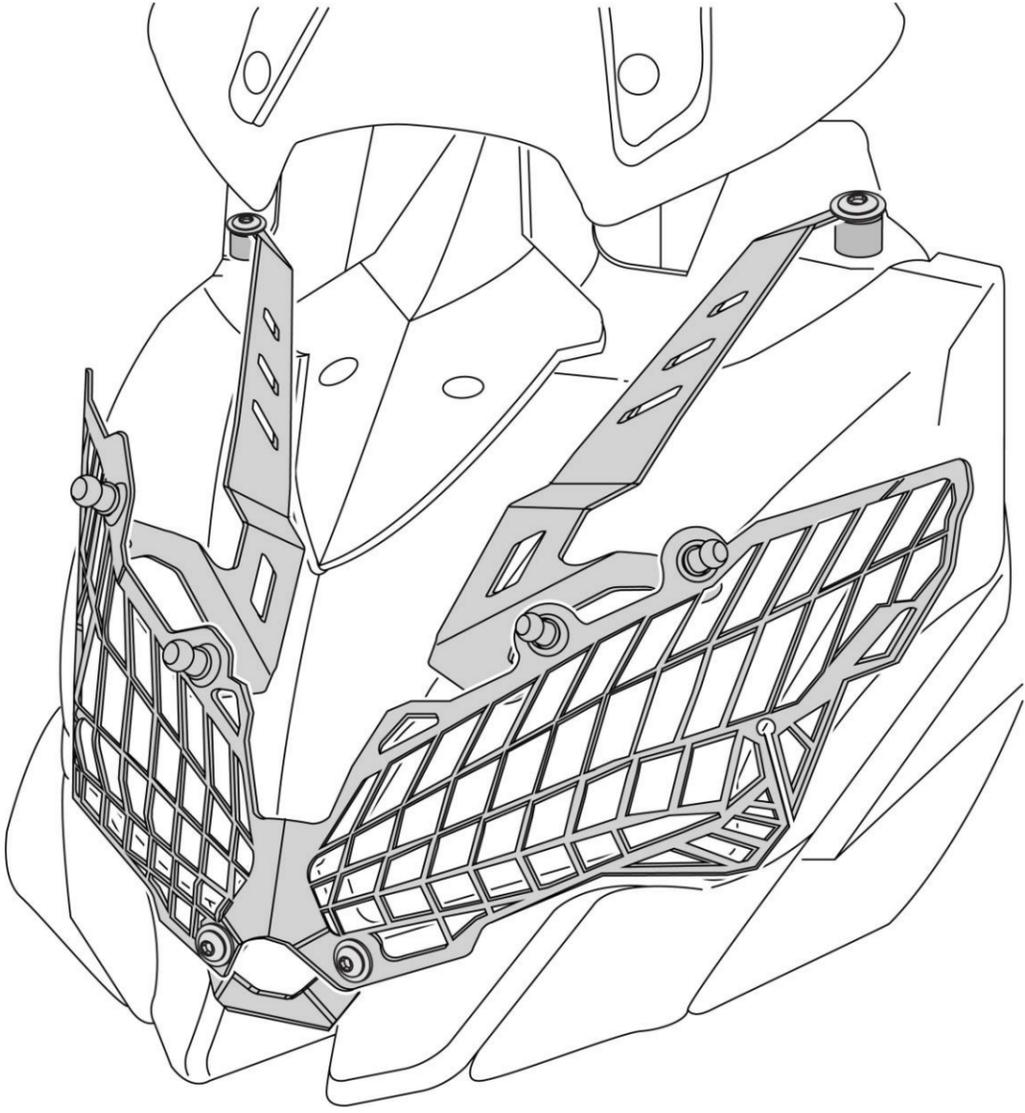

The Installation of the Head Light Guard is complete and is as shown



General Instructions

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. After Completion of the Mounting and before taking on a First ride, Ensure and Check all functions of the Vehicle. It is always advised to check loosening of the fasteners after the first 50 kilo meters of ride and at regular intervals.
7. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
8. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets